

FORM PTO-1390
(REV. 5-93)

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER
10191/2215

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/088146

INTERNATIONAL APPLICATION NO.
PCT/DE00/02128

INTERNATIONAL FILING DATE
(30.06.00)
30 June 2000

PRIORITY DATE(S) CLAIMED
(30.08.99)
30 August 1999
(08.09.99)
08 September 1999

TITLE OF INVENTION

METHOD OF TRANSMITTING SIGNALING INFORMATION, MASTER STATION, MOBILE STATION AND MESSAGE ELEMENTS

APPLICANT(S) FOR DO/EO/US

HANS, Martin; LAUMEN, Josef; BECKMANN, Mark; and DEICHMANN, Volker

Applicant(s) herewith submit to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (unsigned).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☒ A substitute specification and a marked up version thereof.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: International Search Report (translated), International Preliminary Examination Report (translated) and Form PCT/RO/101.

U.S. APPLICATION NO. if known, see 37 C.F.R. 1.5 <div style="font-size: 1.5em; font-weight: bold;">10/088146</div>	INTERNATIONAL APPLICATION NO. PCT/DE00/02128	ATTORNEY'S DOCKET NUMBER 10191/2215				
17. <input type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) ... \$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$100.00		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center;">CALCULATIONS</td> <td style="width: 50%; text-align: center;">PTO USE ONLY</td> </tr> <tr> <td colspan="2" style="height: 150px;"></td> </tr> </table>	CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY					
ENTER APPROPRIATE BASIC FEE AMOUNT =		\$ 890				
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$				
Claims	Number Filed	Number Extra				
Total Claims	44 - 20 =	24				
Independent Claims	6 - 3 =	3				
Multiple dependent claim(s) (if applicable)		+ \$280.00				
TOTAL OF ABOVE CALCULATIONS =		\$ 1574				
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)		\$				
SUBTOTAL =		\$ 1574				
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$				
TOTAL NATIONAL FEE =		\$ 1574				
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property		\$				
TOTAL FEES ENCLOSED =		\$ 1574				
		Amount to be: refunded \$ charged \$				
a. <input type="checkbox"/> A check in the amount of \$ _____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>11-0600</u> in the amount of \$1574.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>11-0600</u> . A duplicate copy of this sheet is enclosed.						
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.						
SEND ALL CORRESPONDENCE TO:						
<div style="font-size: 1.2em; font-weight: bold;">Kenyon & Kenyon</div> <div style="font-size: 0.8em;">One Broadway New York, New York 10004 CUSTOMER NO. 26646</div>						
<div style="font-size: 1.2em; font-weight: bold;">Richard L. Mayer, Reg. No. 22,490</div> <div style="font-size: 0.8em;">NAME</div> <div style="font-size: 1.2em; font-weight: bold;">February 28, 2002</div> <div style="font-size: 0.8em;">DATE</div>						

[10191/2215]

#4/a

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Martin HANS et al.
Serial No. : To Be Assigned
Filed : Herewith
For : METHOD OF TRANSMITTING SIGNALING
INFORMATION, MASTER STATION, MOBILE STATION
AND MESSAGE ELEMENTS
Art Unit : To Be Assigned
Examiner : To Be Assigned

Assistant Commissioner
for Patents
Washington, D.C. 20231

**PRELIMINARY AMENDMENT AND
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend without prejudice the above-identified application before
examination, as set forth below.

IN THE SPECIFICATION AND ABSTRACT:

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification
(including the Abstract; but without claims) accompanies this response. It is respectfully
requested that the Substitute Specification (including Abstract) be entered to replace the
Specification of record.

IN THE DRAWINGS:

Please add, without prejudice, new Figure 6 enclosed herewith.

IN THE CLAIMS:

On the first page of claims, first line, change "What is claimed is:" to
--WHAT IS CLAIMED IS:--.

express mail #: 51 594613706US

Please cancel, without prejudice, claims 1 to 29 in the underlying PCT application. Please also cancel, without prejudice, claims 1 to 29 in the annex to the International Preliminary Examination Report.

Please add the following new claims:

--30. (New) A method of transmitting signaling information between a master station and a slave station, comprising the step of:

transmitting a third message with the signaling information from the master station to the slave station, the third message including information regarding whether data to be sent is processed in one of the master station and an additional master station downstream from and assigned to the slave station to increase reception quality of the data to be sent at the slave station, in accordance with measures relating to a transmission channel between the slave station and at least one of the master station and the additional master station.

31. (New) The method according to claim 30, wherein the master station includes a base station.

32. (New) The method according to claim 30, wherein the slave station includes mobile station.

33. (New) The method according to claim 30, wherein the third message includes information regarding whether data to be sent is processed in the one of the master station and the additional master station in accordance with a change of the slave station from a first radio cell to a second radio cell of a radio network.

34. (New) The method according to claim 30, wherein information regarding a type of processing of the data to be sent is transmitted in the transmitting step with the third message from the master station to the slave station.

35. (New) The method according to claim 30, wherein the third message is transmitted in the transmitting step, with regard to a single transmission channel for transmission of the data to be sent.

36. (New) The method according to claim 30, wherein the third message is transmitted in the transmitting step with regard to multiple transmission channels for transmission of the data to be sent when a type of processing in the multiple transmission channels is the same.

37. (New) The method according to claim 30, wherein information regarding whether the data to be sent from the one of the master station and the additional master station is emitted by one of a single antenna and multiple antennas is transmitted in the transmitting step with the third message.

38. (New) The method according to claim 30, wherein information regarding whether the data to be sent is predistorted in one of the master station and the additional master station is transmitted in the transmitting step with the third message.

39. (New) The method according to claim 38, wherein information regarding whether predistortion is performed as a function of an estimated pulse response of at least one time slot transmission channel between the slave station and one of the master station and the additional master station is transmitted in the transmitting step with the third message.

40. (New) The method according to claim 30, further comprising the step of: transmitting a second message from the slave station to the master station, the second message including information regarding which types of processing of the data to be sent by the master station are supported by the slave station to detect the data to be sent, the second message including the signaling information before the third message.

41. (New) The method according to claim 40, further comprising the step of: processing the data to be sent in the master station as a function of the second message in a manner supported by the slave station for detecting the data to be sent.

42. (New) The method according to claim 41, further comprising the step of: transmitting the processed data to be sent in a transmission channel dedicated only to a connection between the master station and the slave station.

43. (New) The method according to claim 41, wherein the signaling information is transmitted in the transmitting step in a processed form from the master station to the slave station at an earliest when, in accordance with the second message, the types of processing supported by the slave station are known by the master station, the processing step occurring in a manner supported by the slave station, and when the third message has been transmitted to the slave station.

44. (New) The method according to claim 30, further comprising the step of:
transmitting a first message from the master station to the slave station, the first message including information regarding which ones of at least one type of processing of the data to be sent are supported by the master station and the signaling information from the master station to the slave station, the first message transmitted in the first message transmitting step when the third message is transmitted in the third transmitting step.

45. (New) The method according to claim 44, wherein the first message is transmitted in the first message transmitting step in a transmission channel accessible to a plurality of slave stations.

46. (New) The method according to claim 30, wherein the signaling information is transmitted in the transmitting step in a processed form at an earliest after transmission of the third message to the slave station from the one of the master station and the additional master station, and the signaling information is transmitted in a transmission channel accessible to a plurality of slave stations.

47. (New) A slave station, comprising:
a first evaluation arrangement configured to analyze a third message from a master station to determine whether data to be sent to the slave station from one of the master station and an additional master station downstream from and assigned to the slave station has been processed by one of the master station and the additional master station to increase a reception quality in accordance with measures relating to a transmission channel between the slave station and at least one of the master station and the additional master station.

48. (New) The slave station according to claim 47, wherein the master station includes a base station.

49. (New) The slave station according to claim 47, wherein the first evaluation arrangement is configured to analyze the third message to determine a type of processing that has been used by one of the master station and the additional master station on the data to be sent.

50. (New) The slave station according to claim 44, further comprising a first selection arrangement configured to select, as a function of the third message analyzed by the first evaluation arrangement, a detection arrangement configured to detect the data to be sent by one of the master station and the additional master station.

51. (New) The slave station according to claim 47, further comprising a first message generation arrangement configured to generate a second message as a function of ones of at least one type of processing of data to be sent by the master station that are supported by the slave station and to transmit the second message to the master station.

52. (New) The slave station according to claim 51, wherein the first evaluation arrangement is configured to analyze a first message from the master station to determine which ones of at least one type of processing of signals to be sent are supported by the master station, and the first evaluation arrangement is configured to check whether the ones of at least one type of processing supported by the master are supported by the slave station, and the first evaluation arrangement is configured to activate the first message generation arrangement so that at least one type of processing supported by both the master station and the slave station is indicated in the second message.

53. (New) A master station, comprising:
a second message generation arrangement configured to generate a third message including information regarding that data to be sent is processed in one of the master station and an additional master station downstream from and assigned to a slave station to increase a reception quality of the data to be sent at the slave station in accordance with measures relating to a transmission channel between the slave station and at least one of the master

station and the additional master station, the second message generation arrangement configured to transmit the third message to the slave station.

54. (New) The master station according to claim 53, wherein the slave station includes a mobile station.

55. (New) The master station according to claim 53, wherein the second message generation arrangement is configured to indicate in the third message a type of processing performed on the data to be sent in one of the master station and the additional master station.

56. (New) The master station according to claim 53, wherein the second message generation arrangement is configured to generate, before transmission of the third message, a first message including information regarding which ones of at least one type of processing of data to be sent by the master station are supported by the master station, the second message generation arrangement configured to transmit the first message to the slave station.

57. (New) The master station according to claim 53, further comprising a second evaluation arrangement configured to analyze a second message received from the slave station to determine which ones of at least one type of processing of signals to be sent are supported by the slave station, the second evaluation arrangement configured to check whether the ones of the at least one type of processing supported by the slave station are supported by the master station, the second evaluation arrangement configured to select at least one type of processing that is supported by both the master station and the slave station, the second evaluation arrangement configured to activate the second message generation arrangement so that the at least one selected type of processing is indicated in the third message, and the second evaluation arrangement configured to activate a processing unit to process the data to be sent in accordance with the at least one selected type of processing.

58. (New) The master station according to claim 57, wherein the processing unit is configured to perform a predistortion.

59. (New) The master station according to claim 58, wherein the predistortion includes a joint predistortion.

60. (New) The master station according to claim 57, wherein the processing unit is configured to emit the signals to be sent over multiple antennas.

61. (New) A method of transmitting a message element from a master station to a slave station, comprising the step of:

transmitting information with the message element regarding whether data to be sent is processed by one of the master station and an additional master station downstream from and assigned to the slave station to increase a reception quality at the slave station in accordance with measures relating to a transmission channel between the slave station and at least one of the master station and the additional master station.

62. (New) The method according to claim 61, wherein the master station includes a base station.

63. (New) The method according to claim 61, wherein the slave station includes a mobile station.

64. (New) The method according to claim 61, wherein the method includes an exchange of signaling information.

65. (New) The method according to claim 61, wherein information regarding which ones of at least one type of processing are used on the data to be sent is transmitted in the transmitting step with the message element.

66. (New) A method of transmitting a message element from a master station to a slave station, comprising the step of:

transmitting information with the message element regarding which ones of at least one type of processing of signals to be sent are supported by one of the master station and an additional master station downstream from and assigned to the slave station to increase a reception quality at the slave station in accordance with measures relating to a transmission channel between the slave station and at least one of the master station and the additional master station.

67. (New) The method according to claim 66, wherein the master station includes a base station.

68. (New) The method according to claim 66, wherein the slave station includes a mobile station.

69. (New) The method according to claim 66, wherein the method includes an exchange of signaling information.

70. (New) A method of transmitting a message element from a slave station to a master station, comprising the step of:
transmitting information with the message element regarding which types of processing of signals to be sent by one of the master station and an additional master station downstream from and assigned to the slave station are supported by the slave station in a detection of the signals to be sent to increase a reception quality at the slave station .

71. (New) The method according to claim 70, wherein the slave station includes a mobile station.

72. (New) The method according to claim 70, wherein the master station includes a mobile station.

73. (New) the method according to claim 70, wherein the method includes an exchange of signaling information.--.

REMARKS

This Preliminary Amendment cancels, without prejudice, claims 1 to 29 in the underlying PCT Application No. PCT/DE00/02128. This Preliminary Amendment further cancels, without prejudice, claims 1 to 29 in the annex to the International Preliminary Examination Report and adds new claims 30 to 73. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.121(b)(3), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments

reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. § 1.121(b)(3)(iii) and § 1.125(b)(2), a Marked-Up Version of the Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. Approval and entry of the Substitute Specification (including Abstract) is respectfully requested.

The underlying PCT Application No. PCT/DE00/02128 includes an International Search Report, dated January 15, 2001. The Search Report includes a list of documents that were uncovered in the underlying PCT Application. A copy of the Search Report accompanies this Preliminary Amendment.

The underlying PCT application also includes an International Preliminary Examination Report, dated December 5, 2001. An English translation of the International Preliminary Examination Report and annex thereto accompanies this Preliminary Amendment.

Applicants assert that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully Submitted,

KENYON & KENYON

Dated: February 28, 2002

By: [Signature]

Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200

CUSTOMER NO. 26646

[10191/2215]

METHOD OF TRANSMITTING SIGNALING INFORMATION,
MASTER STATION, MOBILE STATION AND MESSAGE ELEMENTS

FIELD OF THE INVENTION

The present invention relates to a method of transmitting signaling information between a master station and a slave station, a master station, a slave station and message elements.

BACKGROUND INFORMATION

"RRC Protocol Specification," TS 25.331 of 1/1/2000, 3 GPP TSG RAN WG 1) describes that signaling information can be transmitted between a base station and a mobile station to set up at least one transmission channel between the base station and the mobile station dedicated specifically to data exchange between the base station and the mobile station. For such a transmission channel, the pulse response may be estimated, and the estimated pulse response may be used for predistortion of the signal to be transmitted, so that an arrangement for removing distortion may be omitted in the slave station. Such a method of predistortion is the joint predistortion method described in "Summary of Joint Predistortion", TSG-RAN WG1.

In use of such a predistortion method for transmission of data over the specially set-up data channel from the base station to the mobile station as described in "RRC Protocol Specification," the problem arises that it is not known in the mobile station whether or not the base station is transmitting the data predistorted over the at least one specially allocated transmission channel. Therefore, the mobile station cannot decide whether or not it must eliminate distortion from the data received by the base station over the specially set-up transmission channel.

2LS94613706

SUMMARY

In an example method according to the present invention for transmitting signaling information, an example master station according to the present invention and an example slave station according to the present invention, a third message is transmitted with the signaling information from the master station to the slave station containing information regarding whether processing of data to be sent is performed in the master station or in an additional master station downstream from and assigned to the slave station to increase the reception quality of this data at the slave station. Thus, before setting up a transmission channel from the master station to the slave station, the slave station is able to decide how it may detect the data to be sent by the master station or the data to be sent by the other master station downstream from and assigned to the slave station in order to be able to guarantee optimum data reception. If the slave station determines that the data to be sent by the corresponding master station has already been processed in the corresponding master station, then it may omit a complicated distortion elimination because the data will arrive at the slave station with a suitably increased reception quality. Power consumption at the slave station may be minimized in this manner, which may be advantageous when configuring the slave station as a mobile station with battery operation.

Information regarding the type of processing of the data to be sent may be transmitted with the third message from the master station to the slave station. In this manner, any elimination of distortion, which may be necessary in the slave station, is further differentiated so that the distortion elimination in the slave station may be adapted to processing of the signals to be transmitted in a manner that is optimal for the transmission channel to be set up. Further optimization or minimization of the power consumption in the slave station may be achieved in this manner. Furthermore, it is possible to

prevent faulty distortion elimination that is not adapted to the type of processing of data to be transmitted.

5 The third message with regard to multiple transmission channels for the transmission of the data to be sent is transmitted when the type of processing in these transmission channels is the same. This makes it possible to minimize the quantity of data necessary for transmission of the third message.

10 Together with the signaling information before the third message, a second message may be transmitted from the slave station to the master station containing information regarding which type(s) of processing of the data to be sent by the
15 master station is/are supported by the slave station for detection of this data. This makes it possible to prevent the master station from processing the data to be sent to the slave station in a manner in which distortion may be eliminated by the slave station only to a limited extent or
20 not at all. Instead, the master station may adapt the processing of the data to be sent to the slave station to the detection mechanisms or distortion elimination mechanisms supported by the slave station to guarantee an optimum transmission.

25 The signaling information may be transmitted in a processed form as the data to be sent from the master station to the slave station at the earliest when, on the basis of the second message, the type of processing supported by the slave station
30 or the types of processing supported by the slave station is/are known at the master station, the processing occurring in a manner supported by the slave station, and when the third message has been transmitted to the slave station. In this manner, even before the special transmission channel from the
35 master station to the slave station has been set up, signaling information may be processed in the master station so that its reception quality at the slave station is increased, and thus

less complexity may be required for elimination of distortion in the slave station, so that it is possible to save on the cost of distortion elimination in the slave station at the earliest point possible and thus also reduce power consumption.

Together with the signaling information before the third message, a first message may be transmitted from the master station to the slave station containing information regarding which type(s) of processing of the data to be sent is/are supported by the master station. In this manner, the slave station is able to select a type of processing of the data to be sent and make known to the master station the selected type of processing by way of the second message. The selection may be made by the slave station in which a way as to permit detection and distortion elimination of the data to be transmitted from the master station in a manner that is as favorable as possible for it and saves on complexity and power consumption.

The first message, the second message and the third message may each be transmitted between the master station and the slave station via a message element and may thus be integrated easily into an existing signaling protocol.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating an example master station and an example slave station according to the present invention.

Figure 2 is a flow chart illustrating the exchange of signaling information according to a first example embodiment of the present invention.

Figure 3 is a flow chart illustrating the exchange of signaling information according to a second example embodiment of the present invention.

Figure 4 is a flow chart illustrating the exchange of signaling information according to a third example embodiment of the present invention.

- 5 Figure 5 is a flow chart illustrating the exchange of signaling information according to a fourth example embodiment of the present invention.

10 Figure 6 illustrates an arrangement of an example slave station according to the present invention for use in a cellular mobile wireless network before transmission from a master station to another master station.

DETAILED DESCRIPTION

- 15 Figure 1 illustrates a master station 1 of a telecommunications network, which may be configured to be wireless or hardwired. Figure 1 also illustrates a slave station 5 of the telecommunications network, which may be configured to be wireless or hardwired. Between master station 1 and slave station 5, at least one transmission channel may be set up which may also be wireless or hardwired depending on the configuration of master station 1 and slave station 5. Data is to be transmitted from master station 1 to slave station 5 over this at least one transmission channel, the at least one transmission channel being dedicated specifically to this data transmission from master station 1 to slave station 5. At least one separate transmission channel in each case may be set up for the transmission of data from master station 1 to other slave stations. Such a transmission channel which is dedicated to the transmission of data from master station 1 to a special slave station is also referred to below as a dedicated channel. When a transmission channel is mentioned below, it should be understood to refer to such a dedicated channel. To form such a dedicated channel, one or more physical resources may be used. These physical resources may include a frequency, a period of time, e.g., in the form of a time slot, a spatial sector, e.g., in the emission range of an

antenna, a code, etc. If master station 1 supplies multiple slave stations with data, the individual transmission channels from master station 1 may be multiplexed, with the individual slave stations each being able to access the transmission channel assigned to them in accordance with the physical resources used according to a suitable channel access method to receive the data sent from master station 1 to these slave stations. Depending on the physical resources used, this channel access method may include a frequency division multiple access method (FDMA), a time division multiple access method (TDMA), a space division multiple access method (SDMA), a code division multiple access method (CMDA), etc. or any combination of these methods.

For example, master station 1 may be a base station and slave station 5 may be configured as a mobile station of a mobile wireless network. The at least one transmission channel to be set up between base station 1 and mobile station 5 is configured a wireless channel. The mobile wireless network, base station 1 and mobile station 5 may be configured, for example, according to the GSM standard (global system for mobile communications), the UMTS standard (universal mobile telecommunication system), etc. For example, the mobile wireless network, base station 1 and mobile station 5 may be configured according to the UMTS standard, and the mobile wireless network according to the UMTS standard may be based on a CDMA system in TDD mode (time division duplex). A half duplex connection is set up between base station 1 and mobile station 5, providing different time slots for the transmission from base station 1 to mobile station 5 and from mobile station 5 to base station 1. At least one time slot is provided for the transmission from base station 1 to mobile station 5. The data transmitted from base station 1 to mobile station 5 in this time slot is coded according to a CDMA code and modulated to a carrier frequency. The CDMA code, the time slot and the carrier frequency are each a physical resource, the combination of which forms a transmission channel from

base station 1 to mobile station 5. Mobile station 5 includes a first receiving unit 85, which is connectable alternately to a first detection arrangement 30 or a second detection arrangement 35 over first selector arrangement 25. First analyzer arrangement 20 is connected to first receiving unit 85. First analyzer arrangement 20 activates first message generating arrangement 40, and first selector arrangement 25 activates mobile station 5. A first receiving antenna 60 is connected to first receiving unit 85, and a transmitting antenna 70, of mobile station 5, is connected to first message generating arrangement 40. First receiving antenna 60 and transmitting antenna 70 of mobile station 5 may also be combined via an antenna splitter, for example, and joined together to form a common transmitting/receiving antenna. Base station 1 includes a second analyzer arrangement 50, a second message generating arrangement 45 and a processing unit 55. A second receiving antenna 65 is connected to second analyzer arrangement 50 a second receiving unit 90. Processing unit 55 is optionally connectable to a first antenna unit 10 or to a second antenna unit 15, over second selector arrangement 75. Second message generating arrangement 45 is optionally connectable to first antenna unit 10 or to processing unit 55 over a third selector arrangement 80. First selector arrangement 25, second selector arrangement 75 and third selector arrangement 80 may each be a configured a controllable switch as illustrated in Figure 1, first selector arrangement 25 being activated by first analyzer arrangement 20 and second selector arrangement 75 and third selector arrangement 80 being activated by second analyzer arrangement 50. First antenna unit 10 is configured a single transmitting antenna. Second antenna unit 15 includes at least two transmitting antennas and makes it possible to send out signals in a transmission diversity operation. With base station 1 it is also possible to combine transmitting and receiving antennas in the manner described with respect to mobile station 5 into one or (in the case of transmission

diversity operation) multiple transmitting/receiving antennas by using an antenna splitter.

To set up at least one transmission channel from base station 1 to mobile station 5, first an exchange of signaling information between base station 1 and mobile station 5 may be necessary to cause the corresponding allocation of physical resources necessary to form the transmission channel. The present invention provides for the data that is to be sent from base station 1 to mobile station 5 over the transmission channel to be set up to be processed in base station 1 to increase the quality of reception of this data at mobile station 5. Detection of the data thus received then may require little or no additional complexity in mobile station 5, so that the power consumption in mobile station 5 is reduced and the standby time of mobile station 5 is increased. Mobile station 5 is capable of switching between two different detection arrangements 30, 35, depending on the quality with which the data is to be received from base station 1. However, to do so, mobile station 5 should know whether the data to be sent has been processed at all in base station 1. Therefore, before setting up the transmission channel, a third message is transmitted from base station 1 to mobile station 5 with the signaling information, containing information regarding whether processing of the data to be sent is performed in master station 1. The third message is generated by second message generating arrangement 45 and emitted over third selector arrangement 80 and first antenna unit 10 to first receiving unit 85. First analyzer arrangement 20 then checks on the basis of the third message to determine whether processing of the data to be sent is performed in base station 1. If this is the case, then first detection arrangement 30 is selected for the detection. Otherwise, second detection arrangement 35 is selected for the detection. Optionally, the data to be sent may be processed in base station 1 in various manners. Then, with the third message, information regarding the type of processing of the data to be sent is also

transmitted from base station 1 to slave station 5. To this as indicated with dotted lines in Figure 1, mobile station 5 may include third detection arrangement 36, which may also be connectable to first receiving unit 85 over first selector arrangement 25. First analyzer arrangement 20 checks first on the basis of the third message whether the data to be sent has already been processed in base station 1. If this is not the case, then first analyzer arrangement 20 causes first selector arrangement 25 to connect first receiving unit 85 to second detection arrangement 35. Otherwise, first analyzer arrangement 20 checks on the basis of the third message to determine the type of processing of the data to be sent in base station 1. Depending on the type of processing, first analyzer arrangement 20 may then cause first selector arrangement 25 to connect first detection arrangement 30 or third detection arrangement 36 to first receiving unit 85. The data to be sent from base station 1 is then detected by the detection arrangement connected to first receiving unit 85.

It is possible to provide for the data to be sent from base station 1 to mobile station 5 to be transmitted in a single dedicated transmission channel. However, it is also possible for multiple dedicated transmission channels may to be set up for the transmission. The third message is then transmitted individually from base station 1 to first analyzer arrangement 20 over first receiving unit 85 for each transmission channel to be set up. This may be performed e.g., if the data to be sent in the various transmission channels is to be processed by different methods in base station 1 or if data without processing is to be sent in one transmission channel and data with processing is to be sent in another transmission channel. However, if data without processing is to be transmitted from base station 1 to mobile station 5 in multiple transmission channels or if data processed according to the same method is to be transmitted in various transmission channels, then it is also possible for a single third message with regard to multiple transmission channels to be transmitted from base

station 1 to mobile station 5 if the type of processing in these transmission channels is the same or if no processing occurs in these transmission channels.

- 5 Processing of the data to be sent may occur in base station 1 in various manners. First, the data to be sent from base station 1 may be emitted using a transmission diversity method by first antenna unit 10 having one transmitting antenna or by second antenna unit 15 having multiple transmitting antennas.
- 10 Use of first antenna unit 10 having one transmitting antenna represents the traditional case without processing of the data to be sent. When using second antenna unit 15 having multiple transmitting antennas, a multiway reception is generated in mobile station 5 through which signal dips or fading on one or
- 15 more of the reception pathways may be compensated by a reception pathway without fading. Thus, with the third message it is possible to transmit information regarding whether the data to be sent from base station 1 is to be emitted by first antenna unit 10 or by second antenna unit 15.
- 20 If the data to be sent is emitted by first antenna unit 10, first analyzer arrangement 20 causes second detection arrangement 35 to be connected over first selector arrangement 25 to first receiving unit 85. Otherwise, third detection arrangement 36 is connected to first receiving unit 85 over
- 25 first selector arrangement 25. Second detection arrangement 35 then performs distortion removal and detection on the received data in a conventional manner, e.g., according to a joint detection method (JD). Such a method is described in "System Description Performance Evaluation," Concept Group Delta WB-
- 30 TDMA/CDMA, ETSI, SMG2. This method includes a combined cancellation of multiple user interference and intersymbol interference. Multiple user interference occurs due to mutual influencing of codes assigned to different mobile stations in transmission over multiplexed transmission channels.
- 35 Intersymbol interference occurs due to multiway propagation of signals in the radio channel.

Third detection arrangement 36 may also operate according to a JD method adapted to second antenna unit 15 used with regard to the estimate of the pulse response of the transmission channels used, which may be necessary for removing distortion.

Processing of the data to be sent from base station 1 may also occur by predistortion of the data to be sent in processing unit 55. The predistortion is then compensated by the properties of the transmission channel to be set up in comparison with second detection arrangement 35 so that the data to be sent from base station 1 arrives undistorted at first receiving unit 85 and thus distortion removal may no longer be necessary in mobile station 5. The data received may then be detected by first detection arrangement 30, e.g., simply by correlation reception, to which end first detection arrangement 30 is to be connected to first receiving unit 85 over first selector arrangement 25.

First detection arrangement 30 may thus be configured merely as a correlation receiver, e.g., according to a "matched filter" concept such as that described in "Signalübertragung", Lüke, Springer-Verlag, 5th edition, 1991 because it detects suitably processed data from base station 1 arriving undistorted and therefore with a high reception quality at mobile station 5.

However, if the data is sent from base station 1 without predistortion to mobile station 5 over first antenna unit 10, the data reaches first receiving unit 85 with distortion and should be sent to second detection arrangement 35 for distortion removal at an increased outlay. This is much less complex and consumes less power than a strict correlation reception, for example, with first detection arrangement 30. Either the third message is omitted in this case or the third message in this case contains information indicating that no processing occurs in the base station.

An even higher reception quality may be achieved if the predistortion is linked to the emission over second antenna unit 15 so that the signals to be sent arrive at first receiving unit 85 not only without distortion but also without signal dips or fading. In this case, only first detection arrangement 30 may be connected with strict correlation reception to first receiving unit 85 over first selector arrangement 25, for example. Then with the third message, information is transmitted indicating that the data to be sent from base station 1 is emitted by second antenna unit 15 and a predistortion of the data sent is performed in base station 1.

First selector arrangement 25 for connecting the corresponding detection arrangement to first receiving unit 85 is controlled by first analyzer arrangement 20 after analysis of the corresponding third message.

With the CDMA system in TDD mode described here, the joint predistortion method (JP), as described in "Summary of Joint Predistortion", may be used for performing predistortion. Accordingly, with the third message, information regarding whether predistortion is performed by the JP method for the data to be sent is transmitted from base station 1 to mobile station 5. In the JP method, base station 1 estimates the pulse response of the transmission channel from mobile station 5 to base station 1 by way of the time slots used for the transmission from mobile station 5 to base station 1. This estimate may also be used for the transmission channel to be set up from base station 1 to mobile station 5 because in TDD mode the transmission properties of the two transmission channels are essentially the same in the forward and return directions, and there are no frequency differences. The data to be sent is then folded with the inverse estimated pulse response before being transmitted to mobile station 5; and thus it is predistorted.

It is possible to provide for second message to be transmitted from mobile station 5 to base station 1 with the signaling information before the third message containing information regarding which type(s) of processing of the data to be sent from base station 1 is/are supported by mobile station 5 for detection this data. The second message is generated by first message generating arrangement 40 and emitted by transmitting antenna 70 of mobile station 5 to base station 1 where it is received by second receiving unit 90 over second receiving antenna 65 and forwarded to second analyzer arrangement 50. The types of processing supported by mobile station 5 depend on detection arrangements 30, 35, 36 connectable to first receiving unit 85 over first analyzer arrangement 25 in mobile station 5. Thus, in this example embodiment of the present invention, the second message may contain the information that detection in mobile station 5 is possible by strict correlation reception and detection with prior distortion removal according to a joint detection method in two different stages with regard to the outlay for error detection and/or correction. Second analyzer arrangement 50 analyzes the second message to determine which type(s) of processing of signals to be sent is/are supported by mobile station 5. Second analyzer arrangement 50 then checks whether this type or these types of processing is/are also supported by base station 1. In this example embodiment of the present invention, second analyzer arrangement 50 ascertains that the detection offered by mobile station 5 is compatible, for example, with processing by predistortion and/or by predistortion and transmission diversity operation through strict correlation reception. In addition, second analyzer arrangement 50 ascertains on the basis of the second message that the data to be sent may not be sent to mobile station 5 or may be sent only in a partially processed form by transmission diversity operation because with the joint detection method the signals that are distorted on the transmission channel to be set up and are influenced to a greater or lesser extent by fading may be subjected to distortion removal and detected. Second analyzer arranges 50

in this example embodiment ascertain that the types of processing supported by mobile station 5 are also supported by base station 1. Second analyzer arrangement 50 then selects at least one type of processing, which is supported by both base station 1 and mobile station 5, and activates second message generating arrangement 45 so that at least one selected type of processing is indicated in the third message. In addition, second analyzer arrangement 50 activates processing unit 55 and second selector arrangement 75 so that they process the data to be sent according to the at least one selected type of processing. Thus, for example, if second analyzer arrangement 50 ascertains on the basis of the second message that mobile station 5 supports detection with strict correlation reception, it causes processing unit 55 to predistort the signals to be sent and causes second selector arrangement 75 to connect second antenna unit 15 or first antenna unit 10 to processing unit 55. In addition, second analyzer arrangement 50 then causes second message generating arrangement 45 to generate a third message containing information regarding the fact that the data to be sent is predistorted and is emitted over one or more antennas. If the JP method is used for predistortion, this may also be indicated in the third message.

This choice of processing of the data to be sent lead to minimal complexity in mobile station 5 for detection of the data received and to a minimal power consumption.

It is also possible to provide for a first message to be transmitted from base station 1 to mobile station 5 together with the signaling information before the third message this first message containing information regarding which type(s) of processing of the data to be sent is/are supported by base station 1. To do so, second message generating arrangement 45 generates the first message before transmitting the third message and transmits it to mobile station 5. In this example embodiment, the first message contains information regarding

the fact that the data to be sent may be emitted without predistortion and with only one transmitting antenna to mobile station 5. In addition, the first message includes information regarding the fact that data to be sent from base station 1 may be emitted with predistortion and by only a single transmitting antenna. In addition, the first message contains information regarding the fact that the data to be sent may be emitted from base station 1 with predistortion and using multiple antennas. In addition, the first message contains information regarding the fact that the data to be sent may be emitted without predistortion but by multiple antennas. Thus four different types of processing are possible in base station 1 and are contained as information in the first message. The lack of processing of data without predistortion and the use of only one transmitting antenna is also counted as a type of processing. The first message thus generated is received in first receiving unit 85 of mobile station 5 and relayed to first analyzer arrangement 20 for analysis. First analyzer arrangement 20 then analyzes the first message to determine which type(s) of processing of signals to be sent is/are supported by base station 1. First analyzer arrangement 20 then checks whether this type or these types of processing is/are also supported by mobile station 5. In this example embodiment of the present invention, first analyzer arrangement 20 ascertains that the processing by predistortion with or without transmission diversity operation is supported by mobile station 5 through first detection arrangement 30 with strict correlation reception. In addition, first analyzer arrangement 20 ascertains that the lack of processing without predistortion and using only one transmitting antenna is supported by second detection arrangement 35 by using the joint detection method. In addition, first analyzer arrangement 20 ascertains that processing without predistortion and with transmission diversity operation is supported by third detection arrangement 36 by using the joint detection method.

First analyzer arrangement 20 activates first message generating arrangement 40 so that at least one type of processing is indicated in the second message that is supported by both base station 1 and mobile station 5. In this example embodiment of the present invention, first analyzer arrangement 20 activates first message generating arrangement 40 so that the second message may include information the fact that detection with strict correlation reception is possible. The second message may also include information regarding the fact that detection with prior distortion removal by the joint detection method is possible. However, if the latter types of information regarding possible distortion removal by the joint detection method are not included in the second message, then it is certain that base station 1 will provide processing of the data to be sent, permitting detection with strict correlation reception in mobile station 5 and thus minimizing the power consumption in mobile station 5.

Optionally it is also possible to provide for the signaling information itself to be transmitted from base station 1 to mobile station 5 in processed form as the data sent to be sent. However, this may occur at the earliest, when the type of processing supported by mobile station 5 or the types of processing supported by mobile station 5 is/are known at base station 1 on the basis of the second message, the processing occurring according to at least one type supported by mobile station 5. Before transmission of processed signaling information to mobile station 5 base station 1 also transmits a corresponding third message to mobile station 5, to inform mobile station 5 promptly regarding the type of processing used, so that before transmission of the processed signaling information, mobile station 5 is able to set first selector arrangement 25 accordingly to connect the required detection arrangement to first receiving unit 85. In this manner it is also possible to save on power consumption at mobile station 5 in the transmission of signaling information to mobile station 5, e.g., when the signaling information is processed so that

first detection arrangement 30 using strict correlation reception may be used for detection of the received signaling information. In this example embodiment of the present invention, the signaling information may be processed in base station 1 so that it is predistorted, for example, and emitted over one or more transmitting antennas. Detection in mobile station 5 then occurs by connecting first detection arrangement 30 to first receiving unit 85 over first selector arrangement 25, so that strict correlation reception is possible.

Starting from the time when the signaling information is transmitted in processed form from base station 1 to mobile station 5, second analyzer arrangement 50 causes third analyzer arrangement 80 to interrupt the connection of second message generating arrangement 45 to first antenna unit 10 and connect second message generating arrangement 45 to processing unit 55. The processing is then performed as described above, in general for the data to be sent. All the messages generated subsequently for the signaling information by second message generating arrangement 45 are then sent in processed form to mobile station 5 according to the selected type or types of processing.

For the case when the data to be sent is not predistorted in processing unit 55 but instead is processed only by being emitted over multiple antennas it is also possible to provide for the data which is to be sent be only routed through processing unit 55 in a transparent form.

The data to be sent in processed form may be transmitted in a transmission channel dedicated only to the connection between base station 1 and mobile station 5. In the case of a predistortion performed in processing unit 55, this may be indispensable according to the joint predistortion method because this predistortion is only characteristic of the dedicated forward and reverse channels between base station 1

and mobile station 5 and not characteristic of channels that are used jointly by multiple mobile stations. Suitably processed signaling information may also be transmitted in the transmission channel dedicated only to the connection between base station 1 and mobile station 5. However, this may occur at the earliest after transmission of the third message from base station 1 to mobile station 5 because only then this is transmission channel set up. First the signaling information is transmitted in a channel accessible to multiple mobile stations. This is then also true of transmission of the first message which is transmitted before the third message.

The first message, the second message and the third message are each transmitted in the form of a message element as part of the signaling information. Such a message element may be inserted into the existing protocols for exchange of signaling information.

The signaling information to be sent from base station 1 to mobile station 5 is generated by second message generating arrangement 45 and is emitted by first antenna unit 10 to mobile station 5 over a channel used jointly by multiple mobile stations as long as the dedicated transmission channel to be set up between base station 1 and mobile station 5 still exists, the additional signaling information is sent to mobile station 5 by second message generating arrangement 45 over processing unit 55 and either first antenna unit 10 or second antenna unit 15. To generate the messages necessary for the signaling information, second message generating arrangement 45 is activated by second analyzer arrangement 50, which includes a radio resource control RRC. By way of RRC, the operator of the mobile wireless network makes a decision regarding the allocation of the respective physical resources to the setting up of the dedicated transmission channel from base station 1 to mobile station 5. Thus, the physical resources of the transmission channel to be set up are managed in RRC. Whether and when base station 1 will perform joint

predistortion in a time slot transmission channel, for example, is thus decided by the operator of the mobile wireless network over RRC. Information regarding which physical resources are allocated by RRC to which mobile station and by which method is relayed to the respective mobile stations by RRC by using the signaling information to be formed in second message generating arrangement 45. The messages to be formed for this signaling information and the associated message elements are described, for example, in "RRC Protocol Specification."

Figure 2 illustrates a possible signaling scenario plotted over a time axis representing the signaling information to be exchanged between base station 1 and mobile station 5 as a function of time.

Generation of the signaling information to be sent from mobile station 5 to base station 1 may be controlled by first message generating arrangement 40 through first analyzer arrangement 20. The signaling information of mobile station 5 is analyzed by second analyzer arrangement 50 in base station 1, and the signaling information from base station 1 is analyzed by first analyzer arrangement 20 in mobile station 5.

The signaling scenario illustrated in Figure 2 is described for an incoming telephone call to mobile station 5 in an "idle mode" in which there is neither a data transmission between mobile station 5 and base station 1 nor is the exact location of mobile station 5 known to the mobile wireless network. In this idle mode, mobile station 5 may be localized only approximately in the mobile wireless network. Multiple radio cells spanning from one base station in each case are combined to form a localization area, each with the location of mobile station 5 in such a localization area being known. If mobile station 5 leaves one localization area to enter another localization area, it will notify the network operator of this. If mobile station 5 which may be configured as a

cellular telephone, for example, is called up and is in idle mode, base station 1 will first send a "paging" message to mobile station 5 over a paging channel PCH because mobile station 5 is reachable most easily in this manner because of its only approximate localization in idle mode. A connection from base station 1 to mobile station 5 is referred to below as a downlink and a connection from mobile station 5 to base station 1 is referred to as an uplink. The paging channel thus represents a downlink connection. Over this paging channel, mobile station 5 is signaled regarding the incoming call. The "paging" message goes at a first time t_1 to mobile station 5. In idle mode, mobile station 5 assumes that the signaling information sent to it has not been processed, so that first analyzer arrangement 20 activates first selector arrangement 25 so that second detection arrangement 35 is connected to first receiving unit 85 and a joint detection distortion removal and detection occur in mobile station 5, as illustrated in Figure 2 on the side of the mobile station 5 through the letter combination JD at first time t_1 . Mobile station 5 responds to the "paging" message by sending an "RRC connection request" message to base station 1 over a physical RACH (random access channel), which is an uplink channel accessible to all mobile stations. With this message, mobile station 5 requests the network operator over base station 1 to set up a telecommunications link to the subscriber making the call. The RRC of base station 1 and thus the network operator of the mobile wireless network receive this "RRC connection request" message and cause second message generating arrangement 45 to reply to mobile station 5 in response to this "RRC connection request" message with an "RRC connection setup" message. Mobile station 5 has made itself known in the mobile wireless network through this "RRC connection request" message and may be localized this manner in a radio cell of the mobile wireless network. In this example embodiment of the present invention, this may be the radio cell of base station 1. Multiple mobile stations in the radio cell of base station 1 are supplied with signaling infection over a common FACH

(forward access channel). The FACH is a common downlink channel for multiple mobile stations in the radio cell of base station 1. The "RRC connection setup" message is transmitted from base station 1 over the FACH to mobile station 5. Mobile station 5 receives information regarding the mobile wireless network over the "RRC connection setup" message. The "RRC connection setup" message is received in mobile station 5 at a second time t_2 and is also subjected to distortion removal and detection by second detection arrangement 35 by the joint detection method. The period of time between first time t_1 and second time t_2 is used to set up a signaling connection between base station 1 and mobile station 5, which is formed by the FACH in the downlink and by the RACH in the uplink. The RACH is a channel that is accessible to all mobile stations in the radio cell of base station 1. The signaling connection is thus installed completely starting at second time t_2 and is then used for further signaling.

A joint predistortion is suitable only for transmission channels that are set up especially for transmission of information between base station 1 and mobile station 5 and not for channels that are accessible to all mobile stations in the radio cell of base station 1, and therefore the joint predistortion method may not be used for exchange of signaling information over the FACH. Therefore, when using the FACH for the transmission of signaling information from base station 1 to mobile station 5, a conventional distortion removal and detection method may be necessary in mobile station 5, e.g., according to the joint detection method. According to the example embodiment, it is assumed that mobile station 5 supports the reception of signals predistorted by the joint predistortion method in that they connect first detection arrangement 30 to first receiving unit 85 and thus make available a strict correlation reception. This means that mobile station 5 is able to receive signals predistorted by the JP method. To inform the mobile wireless network of this capability, mobile station 5 sends a "UE capability info"

message to base station 1 after receiving an "RRC connection
 setup" message. UE stands for "User Equipment" and thus for
 mobile station 5. The structure of the "UE capability
 information" message is described, for example, in "RRC
 Protocol Specification." The "UE capability info" message sent
 contains among other things a message element having the name
 "UE mode capability." This message element provides
 information, among other things, regarding whether mobile
 station 5 supports TDD and/or FDD (frequency division duplex).
 The "UE mode capability" message element is also described in
 "RRC Protocol Specification." It is presented in Table 1 as
 follows.

Table 1

Parameter	Reference	Type	Comment
System capability (UMTS, GSM, other)			
UMTS capability (TDD, FDD)			
Chip rate capability			
Radio frequency capability			
Variable duplex distance capability			

According to the present invention, an additional piece of information is to be inserted into this message element "UE mode capability," signaling to base station 1 whether mobile station 5, which is sending the "UE capability info" message to base station 1, supports a joint predistortion method. The new message element "UE mode capability" supplemented in this manner, is illustrated according to the present invention in Table 2.

Table 2

Parameter	Reference	Type	Comment
System capability (UMTS, GSM, other)			
UMTS capability (TDD, FDD)			
TDD mode (JD/JP)			TDD mode only
Chip rate capability			
Wireless frequency capability			
Variable duplex distance capability			

The supplementary parameter information "TDD mode (JD/JP)" in this example embodiment describes the fact that in TDD mode, mobile station 5 supports detection of signals predistorted by the JP method. The comment "TDD mode only" means that support of this detection is only possible in TDD mode. The JP method

may not be used in FDD mode, for example, because the pulse response for the forward channel from base station 1 to mobile station 5 may not be estimated from the reverse channel from mobile station 5 to base station 1 because of the different frequency positions in the forward channel and the reverse channel in FDD mode.

The mobile wireless network then knows on the basis of the new message element "UE mode capability" that mobile station 5 is able to receive JP-predistorted signals from base station 1. The RRC then causes second message generating arrangement 45 to send a reception confirmation of the "UE capability info" message in the form of a "UE capability info confirm" message to mobile station 5. This is also subjected to distortion removal by the JD method and is detected by mobile station 5 because it has not yet been predistorted in base station 1 and sent on the FACH to mobile station 5.

Then the parameters for the actual data transmission over the dedicated transmission channel(s) to be set up for the incoming call are negotiated between mobile station 5 and base station 1 or the mobile wireless network over the FACH and RACH. This is illustrated in Figure 2 by the double arrow "direct transfer." After successful negotiation and definition of the parameters for the transmission channels to be set up via "direct transfer," base station 1 sends a "RAB setup" (radio access bearer) message to mobile station 5 over the FACH downlink channel. The structure of such a "RAB setup" message is also described, for example, in "RRC Protocol Specification." With the "RAB setup" message, base station 1 notifies mobile station 5 of the configuration for the actual useful data traffic. The configuration is based on the parameters negotiated previously by direct transfer. Both the signaling information received by direct transfer in mobile station 5 and the "RAB setup" message are transmitted from base station 1 to mobile station 5 over the FACH and are thus subjected to distortion removal by the JD method and are

detected in mobile station 5. The "RAB setup" message contains, among other things, a message element having the name "downlink time slot info", which notifies mobile station 5 of the time slot to be used for the downlink connection of the transmission channel to be set up. So far, the "downlink time slot info" message element has contained as information only the number of the transmission channel to be set up for the downlink from mobile station 5 in downlink to the time slot to be used, i.e., the information about the time slot in which mobile station 5 will receive data from base station 1 over the transmission channel to be set up in the downlink. The "downlink time slot info" message element is also described, for example, in "RRC Protocol Specification" and is presented in Table 3.

Table 3

Parameter	Reference	Type	Comment	
Time slot number			Time slot to be used in the downlink (TDD only)	For each time slot

In the downlink, multiple dedicated transmission channels, each in the form of a time slot allocated to mobile station 5 may be set up between base station 1 and mobile station 5. The comment "for each time slot" in the "downlink time slot info" message element means that the same conditions apply for each allocated time slot.

The "downlink time slot info" message element is an optional message element of the "RAB setup" message.

According to an example embodiment of the present invention, base station 1 also signals in the "downlink time slot info" message element additionally for each allocated time slot

information regarding whether the data in this time slot has been predistorted at base station 1 according to the JP method for transmission over the respective transmission channel to be set up. Various allocated time slots may be treated

differently, i.e., data of a first allocated time slot is not predistorted according to the JP method in base station 1, and data of a second allocated time slot may not be predistorted in base station 1. The "downlink time slot info" message element may then indicate for each time slot allocated for the downlink of the transmission channel to be set up in each case whether or not the data in this time slot has been predistorted according to the JP method at base station 1. The information regarding whether the data in a time slot allocated for the downlink has been predistorted by the JP method at base station 1 may be combined for multiple allocated time slots in the "downlink time slot info" message element if the data in these time slots is treated the same with regard to processing at base station 1.

Table 4 illustrates an example of a new "downlink time slot info" message element implemented according to an example embodiment of the present invention.

Table 4

Parameter	Reference	Type	Comment	
Time slot number			Time slot to be used in the downlink (TDD only)	For each time slot
JD/JP indicator			(TDD only)	For each time slot

In the example illustrated in Table 4, the "downlink time slot info" message element according to the present invention notifies mobile station 5 that all the time slots allocated to mobile station 5 for the respective transmission channel to be

set up between base station 1 and mobile station 5 in the downlink are subjected to JP predistortion with respect to the data transmitted in them in TDD mode only.

5 The signaling scenario illustrated in Figure 2 illustrates an example of processing of the data to be sent to base station 1 by the JP method. However, any other types of predistortion or processing of the data to be sent may also be provided at base station 1 to increase the quality of reception of this data at
10 mobile station 5. Accordingly, the type of processing may be indicated in the new message element "UE mode capability" or in the new message element "downlink time slot info".

The "RAB setup" message is received at mobile station 5 at a
15 third time t_3 . The signaling exchange between base station 1 and mobile station 5 occurs over the FACH in the downlink and over the RACH in the uplink between second time t_2 and third time t_3 , so that the signaling information received at mobile station 5 is still subjected to distortion removal and
20 detected by the JD method in this example. After reception of the "RAB setup" message, mobile station 5 configures its physical layer and sets up a new physical uplink transmission channel from mobile station 5 to base station 1. After successful configuration, mobile station 5 then sends a "RAB
25 configuration complete" message to base station 1 over the newly set-up and configured uplink transmission channel. Mobile station 5 signals to base station 1 via the "RAB configuration complete" message that it has set up this uplink transmission channel from mobile station 5 to base station 1
30 dedicated specifically to the transmission of data from mobile station 5 to base station 1.

After transmitting the "RAB setup" message, base station 1 accordingly sets up a downlink transmission channel from base
35 station 1 to mobile station 5 dedicated specifically to the transmission of data from base station 1 to mobile station 5. A half duplex TDD mode in which one or more time slots each

forms a dedicated uplink transmission channel, and one or more time slots different from those each forms a dedicated downlink transmission channel is thus possible over the two transmission channels set up between base station 1 and mobile station 5. From the data transmitted with the time slots in the respective uplink transmission channel, base station 1 is able to estimate a pulse response of the respective uplink transmission channel this estimated pulse response also representing an estimate of the pulse response of the at least one downlink transmission channel. The estimate may thus be used in base station 1 for JP predistortion of the data to be sent over the at least one downlink transmission channel from base station 1 to mobile station 5. All signaling information and data or useful data received by mobile station 5 from base station 1 then on is received at mobile station 5 over the at least one new downlink transmission channel. This includes both the actual data or useful data of the incoming call and additionally required signaling data. The double arrow labeled as "data exchange" between mobile station 5 and base station 1 characterizes this data exchange over uplink and downlink transmission channels dedicated especially to the connection between base station 1 and mobile station 5. The data to be sent from base station 1 to mobile station 5 is predistorted in base station 1 according to the JP method for at least one of the at least one downlink transmission channel and transmitted to mobile station 5, where it is detected via first detection arrangement 30 by a strict correlation reception.

In a second example embodiment of the present invention illustrated in Figure 3, the signaling scenario described above may be modified so that mobile station 5 is already allocated an uplink channel and a downlink channel at second time t_2 via the "RRC connection setup" message from base station 1, the channels being thereafter dedicated only to the exchange of signaling information between base station 1 and mobile station 5. Mobile station 5 acknowledges the "RRC

connection setup" message with an "RRC connection setup complete" message sent to base station 1 after already being transmitted to base station 1 over the newly set-up uplink channel and has notified it that this uplink channel has been set up successfully. The uplink and downlink channels already allocated to mobile station 5 at second time t_2 for the transmission of the signaling information may thus be differentiated from the uplink and downlink channels allocated to mobile station 5 at third time t_3 for the transmission of the useful data of the incoming call.

However, it is also possible for the uplink and downlink channels allocated to mobile station 5 at second time t_2 to also be used for the transmission of useful data for the incoming call provided as of third time t_3 , for which purpose the uplink and downlink channels set up at second time t_2 need only be reconfigured at third time t_3 . Figure 3 illustrates a second embodiment of the present invention with respect to a variant involving reconfiguration of the uplink and downlink channels.

In the second example embodiment of the present invention, in which uplink and downlink channels are already allocated separately to mobile station 5 at second time t_2 , the JP method is still used starting at third time t_3 , and is signaled to mobile station 5 as described in the "RAB setup" message. When using the uplink and downlink channels allocated to mobile station 5 at second time t_2 after third time t_3 , as well, the signaling to mobile station 5 of the JP method used by base station 1 starting at third time t_3 may also occur in the required reconfiguration of the uplink and downlink channels, which occurs as illustrated in Figure 3, after sending the "RAB setup complete" message from mobile station 5 to base station 1 and before exchange of the useful data. The signaling information to be transmitted from base station 1 to mobile station 5 for the reconfiguration is not yet predistorted by base station 1 and thus is still subjected to

distortion removal and detected in mobile station 5 according to the JD method. For the reconfiguration, the base station sends a "TRCH reconfiguration" message to mobile station 5.

Such a message is described, for example, in "RRC Protocol Specification" referred to above. With this "TRCH

reconfiguration" message, the parameters, such as the data rate of the uplink and downlink channels already allocated to mobile station 5 at second time t_2 , are reconfigured. Mobile station 5 then sends a "TRCH reconfiguration complete" message

over an uplink channel reconfigured in this manner, notifying base station 1 of the successful reconfiguration of the uplink channel. Then, the useful data exchange of the incoming call between base station 1 and mobile station 5 may occur over the reconfigured uplink and downlink channels. Since, as described

with regard to the first example embodiment of the present invention, in the "RAB setup" message, the "downlink time slot info" message element may already contain information regarding predistortion in base station 1, the "TRCH

reconfiguration" message may already be predistorted in the base station, e.g., by the JP method, so that when received in mobile station 5, this message may be detected by strict correlation reception. However, the "downlink time slot info" message element according to another example embodiment of the present invention may also be integrated only into the "TRCH

reconfiguration" message, so that the "TRCH reconfiguration" message is still subjected to distortion removal and detected in mobile station 5 by the JD method, and only the subsequent exchange of useful data of the incoming call and optionally additional signaling information to be exchanged may be

detected in mobile station 5 through strict correlation reception, because it is predistorted by the JP method in base station 1. It has already been provided that the "TRCH reconfiguration" message (TRCH = transport channel) as described in "RRC Protocol Specification" contains the

"downlink time slot info" message element which informs, among other things, mobile station 5 whether processing, e.g., in

the form of predistortion of the data to be sent subsequently, occurs in base station 1.

According to the second example embodiment of the present invention, a downlink channel dedicated to the transmission of signaling information from base station 1 to mobile station 5 is already provided starting at second time t_2 , so that starting at second time t_2 the signaling information to be sent from base station 1 may be predistorted by base station 1, so that it may be detected in mobile station 5 by strict correlation reception to save on power consumption in mobile station 5 at the earliest possible time. From the second embodiment, therefore, a third example embodiment of the present invention, as illustrated in Figure 4, is obtained by the fact that in the "RRC connection request" message, mobile station 5 already transmits a message element having the name "initial UE capability" to base station 1, containing information regarding whether mobile station 5 supports predistortion, e.g., by the JP method, or whether it supports some other processing in base station 1. The "RRC connection request" message is described, for example, in "RRC Protocol Specification" as is the respective optional "initial UE capability" message element. Table 5 shows this "initial UE capability" message element, which was previously not filled with content.

Table 5

Parameter	Reference	Type	Comments

This message element may be modified according to an example embodiment of the present invention as illustrated in Table 6:

Table 6

Parameter	Reference	Type	Comments
TDD mode (JP/JD)			TDD mode only

5

In the example embodiment of the present invention according to Table 6, mobile station 5 notifies base station 1 via the new message element "initial UE capability" that it supports predistortion according to the JP method in base station 1. This occurs through strict correlation reception of the received data. The "RRC connection setup" message transmitted at second time t_2 from base station 1 over the above-mentioned FACH to mobile station 5 is then not yet transmitted in predistorted form and is subjected to distortion removal and detected in mobile station 5 by the JD method. However, as already described for the "TRCH reconfiguration" message, this "RRC connection setup" message already contains the "downlink time slot info" message element via which base station 1 notifies mobile station 5 that the data to mobile station 5 on the dedicated downlink channel to be set up for further signaling is predistorted in base station 1 according to the JP method. In addition, at least one downlink channel and one uplink channel are allocated to mobile station 5 with the "RRC connection setup" message for further exchange of signaling information. Mobile station 5 acknowledges the "RRC connection setup" message with an "RRC connection setup complete" message sent to base station 1 after already being transmitted to base station 1 over the newly set-up uplink channel, notifying it that this uplink channel has been set up successfully. The exchange of the "UE capability info" message and the "UE capability info confirm" message is no longer required according to the example embodiment of the present invention illustrated in Figure 4, so that a direct transfer may be performed in the allocated uplink and downlink channels, with the data transmitted from base station 1 to mobile station 5

already being predistorted according to the JP method. This may also be true of all the other signaling data and useful data to be sent from base station 1 to mobile station 5 for the connection to be set up. Thus, no information notifying mobile station 5 of the JP predistortion in base station 1 is necessary even in the "RAB setup" message. However, such information may be necessary in a "TRCH reconfiguration" message which is provided for a reconfiguration of the uplink and downlink channels that is optionally required, because in such a reconfiguration of mobile station 5, new time slots are optionally allocated.

Figure 5 illustrates a fourth example embodiment of the present invention that corresponds to the first example embodiment, with the difference that an additional "UE capability information request" message has been introduced, prompting base station 1 to cause mobile station 5 to send the "UE capability info" message to base station 1. Then, following the "RRC connection setup" message, the "UE capability information request" message is then sent from base station 1 to mobile station 5, where it is optionally also subjected to distortion removal and detected by the joint detection method. The "UE capability information request" message is also described, for example, in "RRC Protocol Specification." In this "UE capability information request" message, information regarding the type of signaling data to be exchanged with the signaling information is normally transmitted to mobile station 5. According to another example embodiment of the present invention, the "UE capability information request" message may also include a message element querying mobile station 5 regarding which types of processing in base station 1 are supported by mobile station 5. Information in this regard may also be transmitted from base station 1 to mobile station 5 in this additional message element or another additional message element of the "UE capability information request" message, indicating which types of processing of data to be sent are possible in base

station 1. In the example described here this example embodiment of the present invention, for example, it may be indicated in such an additional message element that the four types of processing by base station 1 as described above are possible, if the lack of processing is considered a type of processing. In particular, the JP method may be indicated for the possible predistortion in base station 1 in this example embodiment of the present invention. The additional message element having the information regarding the types of processing of the data to be sent that are supported by base station 1 then corresponds to, contains or is contained in the first message according to the example embodiment illustrated in Figure 1.

The additional message element(s) may optionally also already be sent from base station 1 to mobile station 5 with the "RRC connection setup" message to save on the "UE capability information request" message. Since the "downlink time slot info" message element is already transmitted in the "RRC connection setup" message, the additional message element(s) may also be transmitted as part of the "downlink time slot info" message element, so that no additional message elements are necessary in the "RRC connection setup" message.

The message elements of the first three example embodiments described above, which are transmitted from base station 1 to mobile station 5 and contain information regarding whether the data to be sent from base station 1 to mobile station 5 is processed in base station 1, thus corresponds to, contains or is contained in the third message according to the example embodiment of the present invention illustrated in Figure 1. The message elements transmitted from mobile station 5 to base station 1 in the first three example embodiments described above and containing information regarding whether processing in base station 1 of the data to be sent from base station 1 is supported by mobile station 5 or which type(s) of such processing in base station 1 is/are supported by mobile

station 5 corresponds to, contains or is contained in the second message according to the example embodiment of the present invention illustrated in Figure 1.

5 In the four example embodiments described above, it has been assume for only the sake of the example that processing in base station 1 occurs according to the JP method, for example. However, any desired of processing of the data to be sent in base station 1 may also be signaled via the aforementioned message element. The signaling may be implemented by setting one or more bits in the corresponding message element. It possible that a set bit in the third message stands for a special type of processing of the data to be sent, performed by base station 1, whereas not setting this bit stands for this type of processing not being performed in base station 1. A similar agreement may be made for the first message. A set bit in the second message may be agreed that a specific type of processing of the data to be sent is supported by mobile station 5. Not setting this bit may then indicate that this type of processing is not supported by mobile station 5. A set bit in the first message may indicate that a specific type of processing of the data sent is supported by base station 1. Not setting this bit may then indicate that this type of processing is not supported by base station 1.

25 In addition, the first message at base station 1 may be sent continuously or at regular intervals to all mobile stations belonging to the mobile wireless network with general system information, such as, for example, that described in "RRC Protocol Specification." This first message may contain an additional message element that indicates to the mobile stations whether and which type or types of processing of data to be sent is/are supported by the mobile wireless network or base station 1 belonging to the mobile wireless network. This additional message element may be formed according to Table 6, but is then sent from base station 1 and is then called, for

example, a "base station capability information" message element.

In Figure 6, a portion of the mobile wireless network is illustrated, with master station 1 representing a first base station that spans a first radio cell 1000 and with another master station 2 being provided representing a second base station and spanning a second radio cell 2000, with first radio cell 1000 and second radio cell 2000 being in proximity to one another and overlapping slightly in a transitional area 3000. As illustrated in Figure 6, mobile station 5 has moved into transitional area 3000 within first radio cell 1000. Master station 1 then ascertains that mobile station 5 is able to exchange with second base station 2 signals having a higher reception quality than with first base station 1. Therefore, first base station 1 prepares for a transfer by second base station 2 of the link that has been or is to be set up. Such a transfer is known as a handover. In preparation for and may be exchanged between first base station 1 and second base station 2. It is possible to provide for first base station 1 to transmit the third message to mobile station 5 with this signaling information, which however contains information regarding whether processing of the data to be sent is performed after the handover in second base station 2 to increase the reception quality of this data at mobile station 5, and if so, which type(s) of processing is/are used. Thus, in the case of a handover before the change from first base station 1 to second base station 2, i.e., before setting up a dedicated transmission channel between second base station 2 and mobile station 5, mobile station 5 may decide in the manner described above how it may perform distortion removal and detection of the data sent by second base station 2 to be able to guarantee optimum data reception in which the power consumption is minimized. The possible types of processing of the data to be sent by second base station 2 thus correspond to the types supported by first base station 1, for example,

may also be different. It is also possible for just one type of processing to be supported by second base station 2.

ABSTRACT

A method of transmitting signaling information between a master station and a slave station, a master station, a slave station, and various message elements are used to reduce the power consumption in a mobile slave station. A third message, which contains information regarding whether data to be sent is processed in the master station to increase the reception quality of this data at the slave station, is transmitted with the signaling information from the master station to the slave station.

[10191/2215]

METHOD OF TRANSMITTING SIGNALING INFORMATION,
MASTER STATION, MOBILE STATION AND MESSAGE ELEMENTS

[Background Information]

] FIELD OF THE INVENTION

The present invention [is based on] relates to a method of transmitting signaling information between a master station and a slave station, [and is also based on] a master station, a slave station and message elements [according to the definition of the species of the independent claims].

BACKGROUND INFORMATION

[It is known already from the publication] "RRC Protocol Specification," TS 25.331 of 1/1/2000, 3 GPP TSG RAN WG 1) [,] describes that signaling information can be transmitted between a base station and a mobile station to set up at least one transmission channel between the base station and the mobile station dedicated specifically to data exchange between the base station and the mobile station. For such a transmission channel, the pulse response may be estimated, and the estimated pulse response may be used for predistortion of the signal to be transmitted, so that [means] an arrangement for removing distortion may be omitted in the slave station. Such a method of predistortion is the joint predistortion method [known from the publication] described in "Summary of Joint Predistortion", TSG-RAN WG1.

In use of such a predistortion method for transmission of data over the specially set-up data channel from the base station to the mobile station [according to the aforementioned publication] as described in "RRC Protocol Specification," the problem arises that it is not known in the mobile station whether or not the base station is transmitting the data predistorted over the at least one specially allocated

transmission channel. Therefore, the mobile station cannot decide whether or not it must eliminate distortion from the data received by the base station over the specially set-up transmission channel.

[Advantages of the Invention

] SUMMARY

[The] In an example method according to the present invention for transmitting signaling information, [the] an example master station according to the present invention and [the] an example slave station according to the present invention [having the features of the corresponding independent claims have the advantage over the related art that], a third message is transmitted with the signaling information from the master station to the slave station containing information regarding whether processing of data to be sent is performed in the master station or in an additional master station downstream from and assigned to the slave station to increase the reception quality of this data at the slave station. Thus, before setting up a transmission channel from the master station to the slave station, the slave station is able to decide how it [must] may detect the data to be sent by the master station or the data to be sent by the other master station downstream from and assigned to the slave station in order to be able to guarantee optimum data reception. If the slave station determines that the data to be sent by the corresponding master station has already been processed in the corresponding master station, then it may omit a complicated distortion elimination because the data will arrive at the slave station with a suitably increased reception quality. Power consumption at the slave station may be minimized in this [way,] manner, which [is] may be advantageous [especially when designing] when configuring the slave station as a mobile station with battery operation.

[Advantageous refinements of and improvements on the method, the master station and the slave station according to the corresponding independent claims are possible through the measures characterized in the subordinate claims.

5 It is especially advantageous that information] Information regarding the type of processing of the data to be sent [is also] may be transmitted with the third message from the master station to the slave station. In this [way] manner, any
10 elimination of distortion, which [might] may be necessary in the slave station, is further differentiated so that the distortion elimination in the slave station may be adapted to processing of the signals to be transmitted in a manner that is optimal for the transmission channel to be set up. Further
15 optimization or minimization of the power consumption in the slave station [is achievable] may be achieved in this [way] manner. Furthermore, it is possible to prevent faulty distortion elimination [which] that is not adapted to the type of processing of data to be transmitted.

20 [Another advantage is that the] The third message with regard to multiple transmission channels for the transmission of the data to be sent is transmitted when the type of processing in these transmission channels is the same. This makes it
25 possible to minimize the quantity of data necessary for transmission of the third message.

[Another advantage is that together] Together with the signaling information before the third message, a second
30 message [is] may be transmitted from the slave station to the master station containing information regarding which type(s) of processing of the data to be sent by the master station is/are supported by the slave station for detection of this data. This makes it possible to prevent the master station
35 from processing the data to be sent to the slave station in a

manner in which distortion may be eliminated by the slave station only to a limited extent or not at all. Instead, the master station may adapt the processing of the data to be sent to the slave station to the detection mechanisms or distortion elimination mechanisms supported by the slave station to guarantee an optimum transmission.

[Another advantage is that the] The signaling information [is] may be transmitted in a processed form as the data to be sent from the master station to the slave station at the earliest when, on the basis of the second message, the type of processing supported by the slave station or the types of processing supported by the slave station is/are known at the master station, the processing [taking place] occurring in a manner supported by the slave station, and when the third message has been transmitted to the slave station. In this [way] manner, even before the special transmission channel from the master station to the slave station has been set up, signaling information may be processed in the master station [in such a way] so that its reception quality at the slave station is increased, and thus less complexity [is] may be required for elimination of distortion in the slave station, so that it is possible to save on the cost of distortion elimination in the slave station at the earliest point possible and thus also reduce power consumption.

[Another advantage is that together] Together with the signaling information before the third message, a first message [is] may be transmitted from the master station to the slave station containing information regarding which type(s) of processing of the data to be sent is/are supported by the master station. In this [way] manner, the slave station is able to select a type of processing of the data to be sent and make known to the master station the selected type of processing by way of the second message. The selection may be

made by the slave station in [such] which a way as to permit detection and distortion elimination of the data to be transmitted from the master station in a manner that is as favorable as possible for it and saves on complexity and power consumption.

The first message, the second message and the third message may each be transmitted between the master station and the slave station via a message element [according to the corresponding independent claims] and may thus be integrated [especially] easily into an existing signaling protocol [in an advantageous manner].

[Drawing

] BRIEF DESCRIPTION OF THE DRAWINGS

[Embodiments of the present invention are illustrated in the drawing and explained in greater detail in the following description. Figure 1 shows a block diagram of a master]
Figure 1 is a block diagram illustrating an example master station and an example slave station according to the present invention [and a slave station according to the present invention; Figure 2 shows a flow chart for].

Figure 2 is a flow chart illustrating the exchange of signaling information according to a first example embodiment [;] of the present invention.

Figure 3 [shows] is a flow chart [for] illustrating the exchange of signaling information according to a second example embodiment [;] of the present invention.

Figure 4 [shows] is a flow chart [for] illustrating the exchange of signaling information according to a third example embodiment [;] of the present invention.

Figure 5 [shows] is a flow chart [for] illustrating the exchange of signaling information according to a fourth example embodiment [; and] of the present invention.

Figure 6 [shows] illustrates an arrangement of [the] an example slave station according to the present invention for use in a cellular mobile wireless network before transmission from [the] a master station to another master station.

[Description of the Exemplary Embodiments

] DETAILED DESCRIPTION

[Figure 1 shows] Figure 1 illustrates a master station 1 of a telecommunications network, which may be [designed] configured to be wireless or hardwired. Figure 1 also [shows] illustrates a slave station 5 of the telecommunications network, which may be [designed] configured to be wireless or hardwired. Between master station 1 and slave station 5, at least one transmission channel [should] may be set up which may also be wireless or hardwired depending on the [design] configuration of master station 1 and slave station 5. [Then data] Data is to be transmitted from master station 1 to slave station 5 over this at least one transmission channel, the at least one transmission channel being dedicated specifically to this data transmission from master station 1 to slave station 5. At least one separate transmission channel in each case may be set up for the transmission of data from master station 1 to other slave stations [not shown in Figure 1]. Such a transmission channel which is dedicated to the transmission of data from master station 1 to a special slave station is also referred to below as a dedicated channel. When a transmission channel is mentioned below, it should be understood to refer to such a dedicated channel. To form such a dedicated channel, one or more physical resources may be used. These physical resources may [be] include a frequency, a period of time, e.g., in the form of a time slot, a spatial sector,

e.g., in the emission range of an antenna, a code [or the like], etc. If master station 1 supplies multiple slave stations with data, the individual transmission channels from master station 1 may be multiplexed, with the individual slave stations each being able to access the transmission channel assigned to them in accordance with the physical resources used according to a suitable channel access method to receive the data sent from master station 1 to these slave stations. Depending on the physical resources used, this channel access method may [be] include a frequency division multiple access method (FDMA), a time division multiple access method [(TMDA) or] (TDMA), a space division multiple access method (SDMA), a code division multiple access [(CMDA)] method (CMDA), etc. or [the like or] any [desired] combination of these methods.

For example, [it should be assumed below that] master station 1 [is designed as] may be a base station and slave station 5 [is] may be configured as a mobile station of a mobile wireless network. The at least one transmission channel to be set up between base station 1 and mobile station 5 is [then designed as] configured a wireless channel. The mobile wireless network, base station 1 and mobile station 5 may be [designed] configured, for example, according to the GSM standard (global system for mobile communications), the UMTS standard (universal mobile telecommunication system) [or the like. It should be assumed below, for], etc. For example, [that] the mobile wireless network, base station 1 and mobile station 5 [are designed] may be configured according to the UMTS standard[. Then], and the mobile wireless network according to the UMTS standard [should] may be based on a CDMA system in TDD mode (time division duplex). A half duplex connection is set up between base station 1 and mobile station 5, providing different time slots for the transmission from base station 1 to mobile station 5 and from mobile station 5 to base station 1. At least one time slot is provided for the

transmission from base station 1 to mobile station 5. The data transmitted from base station 1 to mobile station 5 in this time slot is coded according to a CDMA code and modulated to a carrier frequency. The CDMA code, the time slot and the carrier frequency are each a physical resource, the combination of which forms [the] a transmission channel from base station 1 to mobile station 5. Mobile station 5 includes a first receiving unit 85, which is connectable alternately to a first detection [means] arrangement 30 or a second detection [means] arrangement 35 over first selector [means] arrangement 25. First analyzer [means] arrangement 20 [are] is connected to first receiving unit 85. First analyzer [means 20 activate] arrangement 20 activates first message generating [means] arrangement 40, and first selector [means 25 activate] arrangement 25 activates mobile station 5. A first receiving antenna 60 is connected to first receiving unit 85, and a transmitting antenna 70₁ of mobile station 5₁ is connected to first message generating [means] arrangement 40. First receiving antenna 60 and transmitting antenna 70 of mobile station 5 may also be combined via an antenna splitter, for example, and joined together to form a common transmitting/receiving antenna. Base station 1 includes a second analyzer [means] arrangement 50, a second message generating [means] arrangement 45 and a processing unit 55. A second receiving antenna 65 is connected to second analyzer [means] arrangement 50 [over] a second receiving unit 90. Processing unit 55 is optionally connectable to a first antenna unit 10 or to a second antenna unit 15₁ over second selector [means] arrangement 75. Second message generating [means] arrangement 45 [are] is optionally connectable to first antenna unit 10 or to processing unit 55 over a third selector [means] arrangement 80. First selector [means] arrangement 25, second selector [means] arrangement 75 and third selector [means] arrangement 80 may each be [designed as] a configured a controllable switch [according to] as

illustrated in Figure 1, first selector [means] arrangement 25 being activated by first analyzer [means] arrangement 20 and second selector [means] arrangement 75 and third selector [means] arrangement 80 being activated by second analyzer [means] arrangement 50. First antenna unit 10 is [designed as] configured a single transmitting antenna. Second antenna unit 15 includes at least two transmitting antennas and makes it possible to send out signals in a transmission diversity operation. With base station 1 it is also possible to combine transmitting and receiving antennas in the manner described with respect to mobile station 5 into one or (in the case of transmission diversity operation) multiple transmitting/receiving antennas by using an antenna splitter.

To set up at least one transmission channel from base station 1 to mobile station 5, first an exchange of signaling information between base station 1 and mobile station 5 [is] may be necessary to cause the corresponding allocation of physical resources necessary to form the transmission channel. The present invention provides for the data [which] that is to be sent from base station 1 to mobile station 5 over the transmission channel to be set up to be processed in base station 1 to increase the quality of reception of this data at mobile station 5. Detection of the data thus received then [requires] may require little or no additional complexity in mobile station 5, so that the power consumption in mobile station 5 is reduced and the standby time of mobile station 5 is increased. Mobile station 5 is [then] capable of switching between two different detection [means] arrangements 30, 35, depending on the quality with which the data is to be received from base station 1. However, to do so, mobile station 5 [must] should know whether the data to be sent has been processed at all in base station 1. Therefore, before setting up the transmission channel, a third message is transmitted from base station 1 to mobile station 5 with the signaling

information, containing information regarding whether processing of the data to be sent is performed in master station 1. The third message is generated by second message generating [means] arrangement 45 and emitted over third selector [means] arrangement 80 and first antenna unit 10 to first receiving unit 85. First analyzer [means] arrangement 20 then [check] checks on the basis of the third message to determine whether processing of the data to be sent is performed in base station 1. If this is the case, then first detection [means 30 are selected for the detection; otherwise, second detection means 35 are] arrangement 30 is selected for the detection. [Optionally]Otherwise, second detection arrangement 35 is selected for the detection. Optionally, the data to be sent may be processed in base station 1 in various [ways.] manners. Then, with the third message, information regarding the type of processing of the data to be sent is also transmitted from base station 1 to slave station 5. To this [end,] as [shown] indicated with dotted lines in Figure 1, mobile station 5 may include third detection [means] arrangement 36, which [are] may also be connectable to first receiving unit 85 over first selector [means] arrangement 25. First analyzer [means 20 then check] arrangement 20 checks first on the basis of the third message whether the data to be sent has already been processed in base station 1. If this is not the case, then first analyzer [means] arrangement 20 [cause] causes first selector [means] arrangement 25 to connect first receiving unit 85 to second detection [means] arrangement 35. Otherwise, first analyzer [means] arrangement 20 [check] checks on the basis of the third message to determine the type of processing of the data to be sent in base station 1. Depending on the type of processing, first analyzer [means] arrangement 20 may then cause first selector [means] arrangement 25 to connect first detection [means] arrangement 30 or third detection [means] arrangement 36 to first receiving unit 85. The data to be sent from base station

1 is then detected by the detection [means] arrangement connected to first receiving unit 85.

It is possible to provide for the data to be sent from base station 1 to mobile station 5 to be transmitted in a single dedicated transmission channel. However, it is also possible for multiple dedicated transmission channels may to be set up for the transmission. The third message is then transmitted individually from base station 1 to first analyzer [means]

arrangement 20 over first receiving unit 85 for each transmission channel

to be set up. This [is indispensable, especially] may be performed e.g., if the data to be sent in the various transmission channels is to be processed by different methods in base station 1 or if data without processing is to be sent in one transmission channel and data with processing is to be sent in another transmission channel. However, if data without processing is to be transmitted from base station 1 to mobile station 5 in multiple transmission channels or if data processed according to the same method is to be transmitted in various transmission channels, then it is also possible for a single third message with regard to multiple transmission channels to be transmitted from base station 1 to mobile station 5 if the type of processing in these transmission channels is the same or if no processing [takes place] occurs in these transmission channels.

Processing of the data to be sent may [take place] occur in base station 1 in various [ways] manners. First, the data to be sent from base station 1 may be emitted using a transmission diversity method by first antenna unit 10 having one transmitting antenna or by second antenna unit 15 having multiple transmitting antennas. Use of first antenna unit 10 having one transmitting antenna [here] represents the traditional case without processing of the data to be sent. When using second antenna unit 15 having multiple transmitting

antennas, a multiway reception is generated in mobile station 5 through which signal dips or fading on one or more of the reception pathways may be compensated by a reception pathway without fading. Thus, with the third message it is possible to transmit information regarding whether the data to be sent from base station 1 is to be emitted by first antenna unit 10 or by second antenna unit 15. If the data to be sent is emitted by first antenna unit 10, first analyzer [means]

arrangement 20 [cause] causes second detection [means] arrangement 35 to be connected over first selector [means] arrangement 25 to first receiving unit 85. Otherwise, third detection [means] arrangement 36 [are] is connected to first receiving unit 85 over first selector [means] arrangement 25. Second detection [means] arrangement 35 then [perform]

performs distortion removal and detection on the received data in [the traditional] a conventional manner, e.g., according to a joint detection method (JD). Such a method is [known from the publication] described in "System Description Performance Evaluation," Concept Group Delta WB-TDMA/CDMA, ETSI, SMG2.

This [is] method includes a combined cancellation of multiple user interference and intersymbol interference. Multiple user interference occurs due to mutual influencing of codes assigned to different mobile stations in transmission over multiplexed transmission channels. Intersymbol interference occurs due to multiway propagation of signals in the radio channel.

Third detection [means] arrangement 36 may also operate according to a JD method adapted to second antenna unit 15 used with regard to the estimate of the pulse response of the transmission channels used, which [is] may be necessary for removing distortion.

Processing of the data to be sent from base station 1 may also [take place] occur by predistortion of the data to be sent in

processing unit 55. The predistortion is then compensated by the properties of the transmission channel to be set up in comparison with second detection [means] arrangement 35 so that the data to be sent from base station 1 arrives undistorted at first receiving unit 85 and thus distortion removal [is] may no longer be necessary in mobile station 5. The data received may then be detected by first detection [means] arrangement 30, e.g., simply by correlation reception, to which end first detection [means] arrangement 30 [are] is to be connected to first receiving unit 85 over first selector [means] arrangement 25.

First detection [means] arrangement 30 may thus be [designed] configured merely as a correlation [receivers] receiver, e.g., according to a "matched filter" concept such as that [known from the publication] described in "Signalübertragung," [(Signal Transmission)], Lüke, Springer-Verlag, 5th edition, 1991 because [they detect] it detects suitably processed data from base station 1 arriving undistorted and therefore with a high reception quality at mobile station 5.

However, if the data is sent from base station 1 without predistortion to mobile station 5 over first antenna unit 10, the data reaches first receiving unit 85 with distortion and [must] should be sent to second detection [means] arrangement 35 for distortion removal at an increased outlay. This is much less complex and consumes less power than a strict correlation reception, for example, with first detection [means] arrangement 30. Either the third message is omitted in this case or the third message in this case contains information indicating that no processing [takes place] occurs in the base station.

An even higher reception quality may be achieved if the predistortion is linked to the emission over second antenna

unit 15 so that the signals to be sent arrive at first receiving unit 85 not only without distortion but also without signal dips or fading. [Again in] In this case, only first detection [means] arrangement 30 may be connected with strict correlation reception to first receiving unit 85 over first selector [means] arrangement 25, for example. Then with the third message, information is transmitted [regarding the fact] indicating that the data to be sent from base station 1 is emitted by second antenna unit 15 and a predistortion of the data [to be] sent is performed in base station 1.

First selector [means] arrangement 25 for connecting the corresponding detection [means] arrangement to first receiving unit 85 [are] is controlled by first analyzer [means] arrangement 20 after analysis of the corresponding third message.

With the CDMA system in TDD mode described here, the joint predistortion method (JP) [known from the publication cited above], as described in "Summary of Joint Predistortion" [is also recommended], may be used for performing predistortion. Accordingly, with the third message, information regarding whether predistortion is performed by the JP method for the data to be sent is transmitted from base station 1 to mobile station 5. In the JP method, base station 1 estimates the pulse response of the transmission channel from mobile station 5 to base station 1 by way of the time slots used for the transmission from mobile station 5 to base station 1. This estimate may also be used for the transmission channel to be set up from base station 1 to mobile station 5 because in TDD mode the transmission properties of the two transmission channels are essentially the same in the forward and return directions, and there are no frequency differences. The data to be sent is then folded with the inverse estimated pulse

response before being transmitted to mobile station 5, and thus it is predistorted.

It is [also] possible to provide for [a] second message to be transmitted from mobile station 5 to base station 1 with the signaling information before the third message containing information regarding which type(s) of processing of the data to be sent from base station 1 is/are supported by mobile station 5 for detection [of] this data. The second message is generated by first message generating [means] arrangement 40 and emitted by transmitting antenna 70 of mobile station 5 to base station 1 where it is received by second receiving unit 90 over second receiving antenna 65 and forwarded to second analyzer [means] arrangement 50. The types of processing supported by mobile station 5 depend on detection [means] arrangements 30, 35, 36 connectable to first receiving unit 85 over first analyzer [means] arrangement 25 in mobile station 5. Thus [in], in this example embodiment of the present [example] invention, the second message may contain the information that detection in mobile station 5 is possible by strict correlation reception and detection with prior distortion removal according to a joint detection method in two different stages with regard to the outlay for error detection and/or correction. Second analyzer [means 50 analyze] arrangement 50 analyzes the second message [then] to determine which type(s) of processing of signals to be sent is/are supported by mobile station 5. Second analyzer [means] arrangement 50 then [check] checks whether this type or these types of processing is/are also supported by base station 1. In this example embodiment of the present [example] invention, second analyzer [means 50 ascertain] arrangement 50 ascertains that the detection offered by mobile station 5 is compatible, for example, with processing by predistortion and/or by predistortion and transmission diversity operation through strict correlation reception. In addition, second analyzer

[means 50 ascertain] arrangement 50 ascertains on the basis of the second message that the data to be sent [cannot] may not be sent to mobile station 5 or may be sent only in a partially processed form by transmission diversity operation because

5 with the joint detection method the signals that are distorted on the transmission channel to be set up and are influenced to a greater or lesser extent by fading may be subjected to distortion removal and detected. Second analyzer [means] arranges 50 in this example [thus] embodiment ascertain that

10 the types of processing supported by mobile station 5 are also supported by base station 1. Second analyzer [means] arrangement 50 then [select] selects at least one type of processing, which is supported by both base station 1 and mobile station 5, and [activate] activates second message

15 generating [means] arrangement 45 so that at least one selected type of processing is indicated in the third message. In addition, second analyzer [means 50 activate] arrangement 50 activates processing unit 55 and second selector [means] arrangement 75 so that they process the data to be sent

20 according to the at least one selected type of processing. Thus, for example, if second analyzer [means 50 ascertain] arrangement 50 ascertains on the basis of the second message that mobile station 5 supports detection with strict correlation reception, it causes processing unit 55 to

25 predistort the signals to be sent and causes second selector [means] arrangement 75 to connect second antenna unit 15 or first antenna unit 10 to processing unit 55. In addition, second analyzer [means] arrangement 50 then [cause] causes second message generating [means] arrangement 45 to generate a

30 third message containing information regarding the fact that the data to be sent is predistorted and is emitted over one or more antennas. If the JP method is used for predistortion, this may also be indicated in the third message.

This choice of processing of the data to be sent [leads] lead to minimal complexity in mobile station 5 for detection of the data received [there] and to a minimal power consumption.

5 It is also possible to provide for a first message to be transmitted from base station 1 to mobile station 5 together with the signaling information before the third message[,] this first message containing information regarding which type(s) of processing of the data to be sent is/are supported
 10 by base station 1. To do so, second message generating [means 45 generate] arrangement 45 generates the first message before transmitting the third message and [they transmit] transmits it to mobile station 5. In [the] this example [described here] embodiment, the first message contains information regarding
 15 the fact that the data to be sent may be emitted without predistortion and with only one transmitting antenna to mobile station 5. In addition, the first message includes information regarding the fact that data to be sent from base station 1 may be emitted with predistortion and by only a single
 20 transmitting antenna. In addition, the first message contains information regarding the fact that the data to be sent may be emitted from base station 1 with predistortion and using multiple antennas. In addition, the first message contains information regarding the fact that the data to be sent may be
 25 emitted without predistortion but by multiple antennas. Thus four different types of processing are possible in base station 1 and are contained as information in the first message. The lack of processing of data without predistortion and the use of only one transmitting antenna is also counted
 30 as a type of processing. The first message thus generated is received in first receiving unit 85 of mobile station 5 and relayed to first analyzer [means] arrangement 20 for analysis. First analyzer [means] arrangement 20 then [analyze] analyzes the first message to determine which type(s) of processing of signals to be sent is/are supported by base station 1. First
 35 analyzer [means] arrangement 20 then [check] checks whether

this type or these types of processing is/are also supported by mobile station 5. In this example embodiment of the present [example] invention, first analyzer [means 20 ascertain] arrangement 20 ascertains that the processing by predistortion with or without transmission diversity operation is supported by mobile station 5 through first detection [means] arrangement 30 with strict correlation reception. In addition, first analyzer [means 20 ascertain] arrangement 20 ascertains that the lack of processing without predistortion and using only one transmitting antenna is supported by second detection [means] arrangement 35 by using the joint detection method. In addition, first analyzer [means 20 ascertain] arrangement 20 ascertains that processing without predistortion and with transmission diversity operation is supported by third detection [means] arrangement 36 by using the joint detection method.

First analyzer [means 20 then activate] arrangement 20 activates first message generating [means] arrangement 40 so that at least one type of processing is indicated in the second message [which] that is supported by both base station 1 and mobile station 5. In this example embodiment of the present invention, first analyzer [means 20 may activate] arrangement 20 activates first message generating [means] arrangement 40 so that the second message may include information [regarding] the fact that detection with strict correlation reception is possible. [Of course, the] The second message may also include information regarding the fact that detection with prior distortion removal by the joint detection method is possible. However, if the latter types of information regarding possible distortion removal by the joint detection method are not included in the second message, then it is certain that base station 1 will provide processing of the data to be sent, permitting detection with strict

correlation reception in mobile station 5 and thus minimizing the power consumption in mobile station 5.

Optionally it is also possible to provide for the signaling information itself to be transmitted from base station 1 to mobile station 5 in processed form as the data sent to be sent. However, this may [take place] occur at the earliest, when the type of processing supported by mobile station 5 or the types of processing supported by mobile station 5 is/are known at base station 1 on the basis of the second message, the processing [taking place] occurring according to at least one type supported by mobile station 5. Before transmission of processed signaling information to mobile station 5[,] base station 1 also transmits a corresponding third message to mobile station 5, to inform mobile station 5 promptly regarding the type of processing used, so that before transmission of the processed signaling information, mobile station 5 is able to set first selector [means] arrangement 25 accordingly to connect the required detection [means] arrangement to first receiving unit 85. In this [way,] manner it is also possible to save on power consumption at mobile station 5 in the transmission of signaling information to mobile station 5, [especially] e.g., when the signaling information is processed so that first detection [means] arrangement 30 using strict correlation reception may be used for detection of the received signaling information. In [the] this example [described here] embodiment of the present invention, the signaling information [could] may be processed in base station 1 [in such a way] so that it is predistorted, for example, and emitted over one or more transmitting antennas. Detection in mobile station 5 then [takes place] occurs by connecting first detection [means] arrangement 30 to first receiving unit 85 over first selector [means] arrangement 25, so that strict correlation reception is possible.

Starting from the time when the signaling information is transmitted in processed form from base station 1 to mobile station 5, second analyzer [means] arrangement 50 [cause] causes third analyzer [means] arrangement 80 to interrupt the connection of second message generating [means] arrangement 45 to first antenna unit 10 and connect second message generating [means] arrangement 45 to processing unit 55. The processing is then performed as [already] described above, in general for the data to be sent. All the messages generated subsequently for the signaling information by second message generating [means] arrangement 45 are then sent in processed form to mobile station 5 according to the selected type or types of processing.

For the case when the data to be sent is not predistorted in processing unit 55 but instead is processed only by being emitted over multiple antennas[,] it is also possible to provide for the data which is to be sent [to] be only routed through processing unit 55 in a transparent form.

The data to be sent in processed form may be transmitted in a transmission channel dedicated only to the connection between base station 1 and mobile station 5. In the case of a predistortion performed in processing unit 55, this [is] may be indispensable according to the joint predistortion method because this predistortion is only characteristic of the dedicated forward and reverse channels between base station 1 and mobile station 5 and not characteristic of channels that are used jointly by multiple mobile stations. Suitably processed signaling information may also be transmitted in the transmission channel dedicated only to the connection between base station 1 and mobile station 5. However, this [goes] may occur at the earliest after transmission of the third message from base station 1 to mobile station 5 because only then [is] this is transmission channel set up. First the signaling

information is transmitted in a channel accessible to multiple mobile stations. This is then also true of transmission of the first message which is transmitted before the third message.

5 The first message, the second message and the third message are each transmitted in the form of a message element as part of the signaling information. Such a message element may be inserted [especially easily] into the existing protocols for exchange of signaling information.

10 The signaling information to be sent from base station 1 to mobile station 5 is generated by second message generating [means] arrangement 45 and is emitted by first antenna unit 10 to mobile station 5 over a channel used jointly by multiple
15 mobile stations as long as the dedicated transmission channel to be set up between base station 1 and mobile station 5 [is still in existence. If this transmission channel] still exists, the additional signaling information is sent to mobile station 5 by second message generating [means] arrangement 45
20 over processing unit 55 and either first antenna unit 10 or second antenna unit 15. To generate the messages necessary for the signaling information, second message generating [means] arrangement 45 [are] is activated by second analyzer [means] arrangement 50, which [include] includes a radio resource
25 control RRC. By way of RRC, the operator of the mobile wireless network makes a decision regarding the allocation of the respective physical resources to the setting up of the dedicated transmission channel from base station 1 to mobile station 5. Thus, the physical resources of the transmission
30 channel to be set up are managed in RRC. Whether and when base station 1 will perform joint predistortion in a time slot transmission channel, for example, is thus decided by the operator of the mobile wireless network over RRC. Information
35 regarding which physical resources are allocated by RRC to which mobile station and by which method is relayed to the respective mobile stations by RRC by using the signaling

information to be formed in second message generating [means] arrangement 45. The messages to be formed for this signaling information and the associated message elements are [known from the aforementioned publication] described, for example, in "RRC Protocol Specification."

Figure 2 [shows] illustrates a possible signaling scenario plotted over a time axis representing the signaling information to be exchanged between base station 1 and mobile station 5 as a function of time.

Generation of the signaling information to be sent from mobile station 5 to base station 1 may be controlled by first message generating [means] arrangement 40 through first analyzer [means] arrangement 20. The signaling information of mobile station 5 is analyzed by second analyzer [means] arrangement 50 in base station 1, and the signaling information from base station 1 is analyzed by first analyzer [means] arrangement 20 in mobile station 5.

The signaling scenario [according to] illustrated in Figure 2 is described for an incoming telephone call to mobile station 5 in an "idle mode" in which there is neither a data transmission between mobile station 5 and base station 1 nor is the exact location of mobile station 5 known to the mobile wireless network. In this idle mode, mobile station 5 may be localized only approximately in the mobile wireless network. Multiple radio cells spanning from one base station in each case are combined [here] to form a localization area, each with the location of mobile station 5 in such a localization area being known. If mobile station 5 leaves one localization area to enter [into] another localization area, it will notify the network operator of this. If mobile station 5[, which may be [designed] configured as a cellular telephone, for example, is called up and is in idle mode, base station 1 will first

send a "paging" message to mobile station 5 over a paging channel PCH because mobile station 5 is reachable most easily in this [way] manner because of its only approximate localization in idle mode. A connection from base station 1 to mobile station 5 is referred to below as a downlink and a connection from mobile station 5 to base station 1 is referred to as an uplink. The paging channel thus represents a downlink connection. Over this paging channel, mobile station 5 is signaled regarding the incoming call. The "paging" message goes at a first time t_1 to mobile station 5. In idle mode, mobile station 5 assumes that the signaling information sent to it has not been processed, so that first analyzer [means 20 activate] arrangement 20 activates first selector [means] arrangement 25 so that second detection [means] arrangement 35 [are] is connected to first receiving unit 85 and a joint detection distortion removal and detection [take place] occur in mobile station 5. This is], as illustrated in Figure 2 on the side of the mobile station 5 through the letter combination JD at first time t_1 . Mobile station 5 responds to the "paging" message by sending an "RRC connection request" message to base station 1 over a physical RACH (random access channel), which is an uplink channel accessible to all mobile stations. With this message, mobile station 5 requests the network operator over base station 1 to set up a telecommunications link to the subscriber making the call. The RRC of base station 1 and thus the network operator of the mobile wireless network receive this "RRC connection request" message and cause second message generating [means] arrangement 45 to reply to mobile station 5 in response to this "RRC connection request" message with an "RRC connection setup" message. Mobile station 5 has made itself known in the mobile wireless network through this "RRC connection request" message and may be localized [in] this [way] manner in a radio cell of the mobile wireless network. In [the example described here, this should] this example embodiment of the present

invention, this may be the radio cell of base station 1.

Multiple mobile stations in the radio cell of base station 1 are supplied with signaling infection over a common FACH (forward access channel). The FACH is a common downlink

5 channel for multiple mobile stations in the radio cell of base station 1. The "RRC connection setup" message is transmitted from base station 1 over the FACH to mobile station 5. Mobile station 5 receives information regarding the mobile wireless network over the "RRC connection setup" message. The "RRC

10 connection setup" message is received in mobile station 5 at a second time t_2 and is also subjected to distortion removal and detection by second detection [means] arrangement 35 by the joint detection method. The period of time between first time t_1 and second time t_2 is used to set up a signaling connection

15 between base station 1 and mobile station 5, which is formed by the FACH in the downlink and by the RACH in the uplink. The RACH is a channel [which] that is accessible to all mobile stations in the radio cell of base station 1. The signaling connection is thus installed completely starting at second
20 time t_2 and is then used for further signaling.

[As described here, a] A joint predistortion is suitable only for transmission channels [which] that are set up especially for transmission of information between base station 1 and
25 mobile station 5 and not for channels [which] that are accessible to all mobile stations in the radio cell of base station 1, and therefore the joint predistortion method [cannot] may not be used for exchange of signaling information over the FACH. Therefore, when using the FACH for the
30 transmission of signaling information from base station 1 to mobile station 5, a [traditional] conventional distortion removal and detection method [is] may be necessary in mobile station 5, e.g., according to the joint detection method. According to the example [described here] embodiment, it is
35 assumed that mobile station 5 supports the reception of

signals predistorted by the joint predistortion method in that they connect first detection [means] arrangement 30 to first receiving unit 85 and thus make available a strict correlation reception. This means that mobile station 5 is able to receive signals predistorted by the JP method. To inform the mobile wireless network of this capability, mobile station 5 sends a "UE capability info" message to base station 1 after receiving an "RRC connection setup" message. UE [here] stands for [user equipment] "User Equipment" and thus for mobile station 5. The structure of the "UE capability information" message is [known from the aforementioned publication] described, for example, in "RRC Protocol Specification." The "UE capability info" message sent [here] contains among other things a message element having the name "UE mode capability." This message element provides information, among other things, regarding whether mobile station 5 supports TDD and/or FDD (frequency division duplex). The "UE mode capability" message element is also [known from the aforementioned publication] described in "RRC Protocol Specification." It is presented in Table 1 as follows.

Table 1

Parameter	Reference	Type	Comment
System capability (UMTS, GSM, other)			
UMTS capability (TDD, FDD)			

Chip rate capability			
Radio frequency capability			
Variable duplex distance capability			

According to the present invention, an additional piece of information is to be inserted into this message element "UE mode capability," signaling to base station 1 whether mobile station 5, which is sending the "UE capability info" message to base station 1, supports a joint predistortion method. The new message element "UE mode capability" supplemented in this [way] manner, is illustrated according to the present invention in Table 2.

Table 2

Parameter	Reference	Type	Comment
System capability (UMTS, GSM, other)			
UMTS capability (TDD, FDD)			
TDD mode (JD/JP)			TDD mode only
Chip rate capability			
Wireless frequency capability			
Variable duplex distance capability			

The supplementary parameter information "TDD mode (JD/JP)" in this example embodiment describes the fact that in TDD mode, mobile station 5 supports detection of signals predistorted by the JP method. The comment "TDD mode only" means that support of this detection is only possible in TDD mode. The JP method [cannot] may not be used in FDD mode, for example, because the pulse response for the forward channel from base station 1 to mobile station 5 [cannot] may not be estimated from the reverse channel from mobile station 5 to base station 1 because of the different frequency positions in the forward channel and the reverse channel in FDD mode.

The mobile wireless network then knows on the basis of the new message element "UE mode capability" that mobile station 5 is able to receive JP-predistorted signals from base station 1.

The RRC then causes second message generating [means]

5 arrangement 45 to send a reception confirmation of the "UE capability info" message in the form of a "UE capability info confirm" message to mobile station 5. This is also subjected to distortion removal by the JD method and is detected by mobile station 5[,] because it has not yet been predistorted
10 in base station 1 and sent on the FACH to mobile station 5.

Then the parameters for the actual data transmission over the dedicated transmission channel(s) to be set up for the incoming call are negotiated between mobile station 5 and base

15 station 1 or the mobile wireless network over the FACH and RACH. This is [shown] illustrated in Figure 2 [through] by the double arrow "direct transfer." After successful negotiation and definition of the parameters for the transmission channels to be set up via "direct transfer," base station 1 sends a
20 "RAB setup" (radio access bearer) message to mobile station 5 over the FACH downlink channel. The structure of such a "RAB setup" message is also [known from the aforementioned publication] described, for example, in "RRC Protocol

Specification." With the "RAB setup" message, base station 1
25 notifies mobile station 5 of the configuration for the actual useful data traffic. The configuration is based on the parameters negotiated previously by direct transfer. Both the signaling information received by direct transfer in mobile station 5 and the "RAB setup" message are transmitted from
30 base station 1 to mobile station 5 over the FACH and are thus subjected to distortion removal by the JD method and are detected in mobile station 5. The "RAB setup" message contains, among other things, a message element having the name "downlink time slot info"1, which notifies mobile station
35 5 of the time slot to be used for the downlink connection of the transmission channel to be set up. So far, the "downlink

time slot info" message element has contained as information only the number of the transmission channel to be set up for the downlink from mobile station 5 in downlink to the time slot to be used, i.e., the information about the time slot in which mobile station 5 will receive data from base station 1 over the transmission channel to be set up in the downlink. The "downlink time slot info" message element is also [known from the aforementioned publication] described, for example, in "RRC Protocol Specification" and is presented in Table 3.

Table 3

Parameter	Reference	Type	Comment	
Time slot number			Time slot to be used in the downlink (TDD only)	For each time slot

In the downlink, multiple dedicated transmission channels, each in the form of a time slot allocated to mobile station 5[,] may be set up between base station 1 and mobile station 5. The comment "for each time slot" in the "downlink time slot info" message element means that the same conditions apply for each allocated time slot.

The "downlink time slot info" message element is an optional message element of the "RAB setup" message.

According to an example embodiment of the present invention, base station 1 also signals in the "downlink time slot info" message element additionally for each allocated time slot information regarding whether the data in this time slot has been predistorted at base station 1 according to the JP method for transmission over the respective transmission channel to be set up. Various allocated time slots may be treated differently, i.e., data of a first allocated time slot [may

bel is not predistorted according to the JP method in base station 1, and data of a second allocated time slot [is] may not be predistorted in base station 1. The "downlink time slot info" message element may then indicate for each time slot allocated for the downlink of the transmission channel to be set up in each case whether or not the data in this time slot has been predistorted according to the JP method at base station 1. The information regarding whether the data in a time slot allocated for the downlink has been predistorted by the JP method at base station 1 may be combined for multiple allocated time slots in the "downlink time slot info" message element if the data in these time slots is treated the same with regard to processing at base station 1.

Table 4 [gives] illustrates an example of a new "downlink time slot info" message element implemented according to an example embodiment of the present invention.

Table 4

Parameter	Reference	Type	Comment	
Time slot number			Time slot to be used in the downlink (TDD only)	For each time slot
JD/JP indicator			(TDD only)	For each time slot

In the example [according to] illustrated in Table 4, the "downlink time slot info" message element according to the present invention notifies mobile station 5 that all the time slots allocated to mobile station 5 for the respective transmission channel to be set up between base station 1 and mobile station 5 in the downlink are subjected to JP predistortion with respect to the data transmitted in them in TDD mode only.

The signaling scenario illustrated in Figure 2 [is described as] illustrates an example of processing of the data to be sent to base station 1 by the JP method. However, any other [type] types of predistortion or processing of the data to be sent may also be provided at base station 1 to increase the quality of reception of this data at mobile station 5. Accordingly, the type of processing [must] may be indicated in the new message element "UE mode capability" or in the new message element "downlink time slot info".

The "RAB setup" message is received at mobile station 5 at a third time t_3 . The signaling exchange between base station 1 and mobile station 5 [takes place] occurs over the FACH in the downlink and over the RACH in the uplink between second time t_2 and third time t_3 , so that the signaling information received at mobile station 5 is still subjected to distortion removal and detected by the JD method in this example. After reception of the "RAB setup" message, mobile station 5 configures its physical layer and sets up a new physical uplink transmission channel from mobile station 5 to base station 1. After successful configuration, mobile station 5 then sends a "RAB configuration complete" message to base station 1 over the newly set-up and configured uplink transmission channel. Mobile station 5 signals to base station 1 via the "RAB configuration complete" message that it has set up this uplink transmission channel from mobile station 5 to base station 1 dedicated specifically to the transmission of data from mobile station 5 to base station 1.

After transmitting the "RAB setup" message, base station 1 accordingly sets up a downlink transmission channel from base station 1 to mobile station 5 dedicated specifically to the transmission of data from base station 1 to mobile station 5. A half duplex TDD mode in which one or more time slots each forms a dedicated uplink transmission channel, and one or more time slots different from those each forms a dedicated

downlink transmission channel is thus possible over the two transmission channels set up between base station 1 and mobile station 5. From the data transmitted with the time slots in the respective uplink transmission channel, base station 1 is able to estimate a pulse response of the respective uplink transmission channel[,] this estimated pulse response also representing an estimate of the pulse response of the at least one downlink transmission channel. The estimate may thus be used in base station 1 for JP predistortion of the data to be sent over the at least one downlink transmission channel from base station 1 to mobile station 5. All signaling information and data or useful data received by mobile station 5 from base station 1 [from] then on is received at mobile station 5 over the at least one new downlink transmission channel. This [is] includes both the actual data or useful data of the incoming call and additionally required signaling data. The double arrow labeled as "data exchange" between mobile station 5 and base station 1 characterizes this data exchange over uplink and downlink transmission channels dedicated especially to the connection between base station 1 and mobile station 5. The data to be sent from base station 1 to mobile station 5 is predistorted in base station 1 according to the JP method for at least one of the at least one downlink transmission channel and transmitted to mobile station 5, where it is detected via first detection [means] arrangement 30 by a strict correlation reception.

In a second example embodiment [according to] of the present invention illustrated in Figure 3, the signaling scenario described above may be modified [in such a way] so that mobile station 5 is already allocated an uplink channel and a downlink channel at second time t_2 via the "RRC connection setup" message from base station 1, the channels being [henceforth] thereafter dedicated only to the exchange of signaling information between base station 1 and mobile station 5. Mobile station 5 acknowledges the "RRC connection

setup" message with an "RRC connection setup complete" message sent to base station 1 after already being transmitted to base station 1 over the newly set-up uplink channel and has notified it that this uplink channel has been set up successfully. The uplink and downlink channels already allocated to mobile station 5 at second time t_2 for the transmission of the signaling information may thus be differentiated from the uplink and downlink channels allocated to mobile station 5 at third time t_3 for the transmission of the useful data of the incoming call.

However, it is also possible for the uplink and downlink channels allocated to mobile station 5 at second time t_2 to also be used for the transmission of useful data for the incoming call provided as of third time t_3 , for which purpose the uplink and downlink channels set up at second time t_2 need only be reconfigured at third time t_3 . Figure 3 [shows the] illustrates a second embodiment of the present invention with respect to [the] a variant involving reconfiguration of the uplink and downlink channels.

In the second example embodiment[,] of the present invention, in which [is characterized in that] uplink and downlink channels are already allocated separately to mobile station 5 at second time t_2 , the JP method is [nevertheless] still used starting at third time t_3 and is signaled to mobile station 5 as described in the "RAB setup" message. When using the uplink and downlink channels allocated to mobile station 5 at second time t_2 after third time t_3 as well, the signaling to mobile station 5 of the JP method used by base station 1 starting at third time t_3 may also [take place] occur in the required reconfiguration of the uplink and downlink channels, which [takes place according to] occurs as illustrated in Figure 3, after sending the "RAB setup complete" message from mobile station 5 to base station 1 and before exchange of the useful data. The signaling information to be transmitted from base

station 1 to mobile station 5 for the reconfiguration is not yet predistorted by base station 1 and thus is still subjected to distortion removal and detected in mobile station 5 according to the JD method. For the reconfiguration, the base station sends a "TRCH reconfiguration" message to mobile station 5[; such]. Such a message is [known from the prior publication] described, for example, in "RRC Protocol Specification". [cited] referred to above. With this "TRCH reconfiguration" message, the parameters, such as the data rate[,] of the uplink and downlink channels already allocated to mobile station 5 at second time t_2 are reconfigured. Mobile station 5 then sends a "TRCH reconfiguration complete" message over an uplink channel reconfigured in this [way] manner, notifying base station 1 of the successful reconfiguration of the uplink channel. Then, the useful data exchange of the incoming call between base station 1 and mobile station 5 may [take place] occur over the reconfigured uplink and downlink channels. Since, as described with regard to the first example embodiment of the present invention, in the "RAB setup" message, the "downlink time slot info" message element may already contain information regarding predistortion in base station 1, the "TRCH reconfiguration" message [could] may already be predistorted in the base station, e.g., by the JP method, so that [on being] when received in mobile station 5, this message [could] may be detected by strict correlation reception. However, the "downlink time slot info" message element according to another example embodiment of the present invention [might] may also be integrated only into the "TRCH reconfiguration" message, so that the "TRCH reconfiguration" message is still subjected to distortion removal and detected in mobile station 5 by the JD method, and only the subsequent exchange of useful data of the incoming call and optionally additional signaling information to be exchanged may be detected in mobile station 5 through strict correlation reception, because it is predistorted by the JP method in base

station 1. It has already been provided that the ["TRCH"] TRCH reconfiguration" message (TRCH = transport channel) [known from the aforementioned publication] as described in "RRC Protocol Specification" contains the "downlink time slot info" message element which informs, among other things, mobile station 5 whether processing, e.g., in the form of predistortion of the data to be sent subsequently, [takes place] occurs in base station 1.

According to the second example embodiment of the present invention, a downlink channel dedicated to the transmission of signaling information from base station 1 to mobile station 5 is already provided starting at second time t_2 , so that starting at second time t_2 the signaling information to be sent from base station 1 [could] may be predistorted by base station 1, so that it [could] may be detected in mobile station 5 by strict correlation reception to save on power consumption in mobile station 5 at the earliest possible time. [Starting with] From the second embodiment, therefore [a third embodiment according to Figure 4], a third example embodiment of the present invention, as illustrated in Figure 4, is obtained by the fact that in the "RRC connection request" message, mobile station 5 already transmits a message element having the name "initial UE capability" to base station 1, containing information regarding whether mobile station 5 supports predistortion, e.g., by the JP method, or whether it supports some other processing in base station 1. The "RRC connection request" message is [known from the aforementioned publication] described, for example, in "RRC Protocol Specification" as is the respective optional "initial UE capability" message element. Table 5 shows this "initial UE capability" message element, which was previously not filled with content.

Table 5

Parameter	Reference	Type	Comments

This message element may be modified according to an example embodiment of the present invention as illustrated in Table 6:

Table 6

Parameter	Reference	Type	Comments
TDD mode (JP/JD)			TDD mode only

In the example embodiment of the present invention according to Table 6, mobile station 5 notifies base station 1 via the new message element "initial UE capability" that it supports predistortion according to the JP method in base station 1. This [takes place] occurs through strict correlation reception of the received data. The "RRC connection setup" message transmitted at second time t_2 from base station 1 over the above-mentioned FACH to mobile station 5 is then not yet transmitted in predistorted form and is subjected to distortion removal and detected in mobile station 5 by the JD method. However, as already described for the "TRCH reconfiguration" message, this "RRC connection setup" message already contains the "downlink time slot info" message element via which base station 1 notifies mobile station 5 that the data to mobile station 5 on the dedicated downlink channel to be set up for further signaling is predistorted in base station 1 according to the JP method. In addition, at least one downlink channel and one uplink channel are allocated to mobile station 5 with the "RRC connection setup" message for further exchange of signaling information. Mobile station 5 acknowledges the "RRC connection setup" message with an "RRC connection setup complete" message sent to base station 1 after already being transmitted to base station 1 over the

newly set-up uplink channel, notifying it that this uplink channel has been set up successfully. The exchange of the "UE capability info" message and the "UE capability info confirm" message is no longer [necessary according to]required

5 according to the example embodiment of the present invention illustrated in Figure 4, so that [then] a direct transfer may be performed in the allocated uplink and downlink channels, with the data transmitted from base station 1 to mobile station 5 already being predistorted according to the JP
10 method. This [is] may also be true of all the other signaling data and useful data to be sent from base station 1 to mobile station 5 for the connection to be set up. Thus, no information notifying mobile station 5 of the JP predistortion in base station 1 is necessary even in the "RAB setup"
15 message. However, such information [is] may be necessary in a "TRCH reconfiguration" message which is provided for a reconfiguration of the uplink and downlink channels that is optionally required, because in such a reconfiguration of mobile station 5, new time slots are optionally allocated.

20 [According to] Figure 5[,] illustrates a fourth example embodiment [which] of the present invention that corresponds to the first example embodiment [is provided], with the difference that an additional "UE capability information
25 request" message has been introduced, prompting base station 1 to cause mobile station 5 to send the "UE capability info" message to base station 1. Then, following the "RRC connection setup" message, the "UE capability information request" message is then sent from base station 1 to mobile station 5,
30 where it is optionally also subjected to distortion removal and detected by the joint detection method. The "UE capability information request" message is also [known from the aforementioned publication] described, for example, in "RRC Protocol Specification." In this "UE capability information
35 request" message, information regarding the type of signaling

data to be exchanged with the signaling information is normally transmitted to mobile station 5. According to another example embodiment of the present invention, the "UE capability information request" message [might] may also include a message element querying mobile station 5 regarding which types of processing in base station 1 are supported by mobile station 5. Information in this regard may also be transmitted from base station 1 to mobile station 5 in this additional message element or another additional message element of the "UE capability information request" message, indicating which types of processing of data to be sent are possible in base station 1. In the example described here this example embodiment of the present invention, for example, it [might] may be indicated in such an additional message element that the four types of processing by base station 1 as described above are possible, if the lack of processing is [also counted as] considered a type of processing. In particular, the JP method [could] may be indicated for the possible predistortion in base station 1 in [the example described here. This] this example embodiment of the present invention. The additional message element having the information regarding the types of processing of the data to be sent [which] that are supported by base station 1 then corresponds to, contains or is contained in the first message [illustrated] according to the example embodiment illustrated in Figure 1.

The additional message element(s) may optionally also already be sent from base station 1 to mobile station 5 with the "RRC connection setup" message to save on the "UE capability information request" message. Since the "downlink time slot info" message element is already transmitted in the "RRC connection setup" message, the additional message element(s) [could] may also be transmitted as part of the "downlink time

slot info" message element, so that no additional message elements are necessary in the "RRC connection setup" message.

The message elements of the first three example embodiments described [here] above, which are transmitted from base

station 1 to mobile station 5 and contain information regarding whether the data to be sent from base station 1 to mobile station 5 is processed in base station 1, thus corresponds to, contains or is contained in the third message [illustrated according to] according to the example embodiment

of the present invention illustrated in Figure 1. The message elements transmitted from mobile station 5 to base station 1 in the first three example embodiments [mentioned] described

above and containing information regarding whether processing in base station 1 of the data to be sent from base station 1 is supported by mobile station 5 or which type(s) of such processing in base station 1 is/are supported by mobile station 5 corresponds to, contains or is contained in the second message [illustrated according to] according to the example embodiment of the present invention illustrated in Figure 1.

In the four example embodiments described [here] above, it has been [assumed] assume for only the sake of the example that

processing in base station 1 [takes place] occurs according to the JP method, for example. However, any desired [type] of processing of the data to be sent in base station 1 may also be signaled via the aforementioned message [elements] element.

The signaling may be implemented by setting one or more bits in the corresponding message element. It [is] possible [to agree here] that a set bit in the third message stands for a special type of processing of the data to be sent, performed by base station 1, whereas not setting this bit stands for this type of processing not being performed in base station 1. [A set bit in the second message may be agreed upon such that

a specific type of processing of the data to be sent is supported by mobile station 5. Not setting this bit then means that this type of processing is not supported by mobile station 5.] A similar agreement may be made for the first

message. A set bit in the [first] second message may be agreed [upon such] that a specific type of processing of the data to be sent is supported by mobile station 5. Not setting this bit may then indicate that this type of processing is not

supported by mobile station 5. A set bit in the first message may indicate that a specific type of processing of the data

sent is supported by base station 1. Not setting this bit may then [means] indicate that this type of processing is not supported by base station 1.

In addition, the first message at base station 1 may be sent continuously or at regular intervals to all mobile stations belonging to the mobile wireless network with [a] general system information [such as that known from the aforementioned publication], such as, for example, that described in "RRC

Protocol Specification." This first message may contain an additional message element [which] that indicates to the mobile stations whether and which type or types of processing of data to be sent is/are supported by the mobile wireless network or base station 1 belonging to the mobile wireless

network. This additional message element may be formed according to Table 6, but is then sent from base station 1 and is then called, for example, a "base station capability information" message element.

[According to] In Figure 6, a portion of the mobile wireless network is [shown] illustrated, with master station 1 representing a first base station [which] that spans a first radio cell 1000 and with another master station 2 being provided representing a second base station and spanning a second radio cell 2000, with first radio cell 1000 and second

radio cell 2000 being in proximity to one another and overlapping slightly in a transitional area 3000. [According to] As illustrated in Figure 6, mobile station 5 has moved into transitional area 3000 within first radio cell 1000.

5 Master station 1 then ascertains that mobile station 5 is able to exchange with second base station 2 signals having a higher reception quality than with first base station 1. Therefore, first base station 1 prepares for a transfer by second base station 2 of the link that has been or is to be set up. Such a transfer is known as a handover. In preparation for and [organization of the handover, suitable signaling information must] may be exchanged between first base station 1 and second base station 2. It is possible to provide for first base station 1 to transmit the third message to mobile station 5 with this signaling information, which however contains information regarding whether processing of the data to be sent is performed after the handover in second base station 2 to increase the reception quality of this data at mobile station 5, and if so, which type(s) of processing is/are used. Thus, in the case of a handover before the change from first base station 1 to second base station 2, i.e., before setting up a dedicated transmission channel between second base station 2 and mobile station 5, mobile station 5 may decide in the manner described [here] above how it [must] may perform distortion removal and detection of the data [to be] sent by second base station 2 to be able to guarantee optimum data reception in which the power consumption is minimized. The possible types of processing of the data to be sent by second base station 2 thus correspond to the types supported by first base station 1, for example, [but] may also be different. It is also possible for just one type of processing to be supported by second base station 2.

[Abstract

] **ABSTRACT**

A method of transmitting signaling information between a master station [(1)] and a slave station[(5)], a master station[(1)], a slave station[(5)], and various message elements are [described, that are] used to reduce the power consumption in a mobile slave station. A third message [containing], which contains information regarding whether data to be sent is processed in the master station [(1)] to increase the reception quality of this data at the slave station[(5)], is transmitted with the signaling information from the master station [(1)] to the slave station[(5)].

[10191/2215]

METHOD OF TRANSMITTING SIGNALING INFORMATION,
MASTER STATION, MOBILE STATION AND MESSAGE ELEMENTS

Background Information

5 The present invention is based on a method of transmitting signaling information between a master station and a slave station, and is also based on a master station, a slave station and message elements according to the definition of the species of the independent claims.

10 It is known already from the publication "RRC Protocol Specification," TS 25.331 of 1/1/2000, 3 GPP TSG RAN WG 1), that signaling information can be transmitted between a base station and a mobile station to set up at least one transmission channel between the base station and the mobile station dedicated specifically to data exchange between the
15 base station and the mobile station. For such a transmission channel, the pulse response may be estimated, and the estimated pulse response may be used for predistortion of the signal to be transmitted so that means for removing distortion may be omitted in the slave station. Such a method of
20 predistortion is the joint predistortion method known from the publication "Summary of Joint Predistortion", TSG-RAN WG1.

25 In use of such a predistortion method for transmission of data over the specially set-up data channel from the base station to the mobile station according to the aforementioned publication "RRC Protocol Specification," the problem arises that it is not known in the mobile station whether or not the base station is transmitting the data predistorted over the at least one specially allocated transmission channel. Therefore,
30 the mobile station cannot decide whether or not it must eliminate distortion from the data received by the base station over the specially set-up transmission channel.

Advantages of the Invention

The method according to the present invention for transmitting signaling information, the master station according to the present invention and the slave station according to the present invention having the features of the corresponding independent claims have the advantage over the related art that a third message is transmitted with the signaling information from the master station to the slave station containing information regarding whether processing of data to be sent is performed in the master station or in an additional master station downstream from and assigned to the slave station to increase the reception quality of this data at the slave station. Thus, before setting up a transmission channel from the master station to the slave station, the slave station is able to decide how it must detect the data to be sent by the master station or the data to be sent by the other master station downstream from and assigned to the slave station in order to be able to guarantee optimum data reception. If the slave station determines that the data to be sent by the corresponding master station has already been processed in the corresponding master station, then it may omit a complicated distortion elimination because the data will arrive at the slave station with a suitably increased reception quality. Power consumption at the slave station may be minimized in this way, which is advantageous especially when designing the slave station as a mobile station with battery operation.

Advantageous refinements of and improvements on the method, the master station and the slave station according to the corresponding independent claims are possible through the measures characterized in the subordinate claims.

It is especially advantageous that information regarding the type of processing of the data to be sent is also transmitted with the third message from the master station to the slave

station. In this way, any elimination of distortion which might be necessary in the slave station is further differentiated so that the distortion elimination in the slave station may be adapted to processing of the signals to be
5 transmitted in a manner that is optimal for the transmission channel to be set up. Further optimization or minimization of the power consumption in the slave station is achievable in this way. Furthermore, it is possible to prevent faulty distortion elimination which is not adapted to the type of
10 processing of data to be transmitted.

Another advantage is that the third message with regard to multiple transmission channels for the transmission of the data to be sent is transmitted when the type of processing in
15 these transmission channels is the same. This makes it possible to minimize the quantity of data necessary for transmission of the third message.

Another advantage is that together with the signaling
20 information before the third message, a second message is transmitted from the slave station to the master station containing information regarding which type(s) of processing of the data to be sent by the master station is/are supported by the slave station for detection of this data. This makes it
25 possible to prevent the master station from processing the data to be sent to the slave station in a manner in which distortion may be eliminated by the slave station only to a limited extent or not at all. Instead, the master station may adapt the processing of the data to be sent to the slave
30 station to the detection mechanisms or distortion elimination mechanisms supported by the slave station to guarantee an optimum transmission.

Another advantage is that the signaling information is
35 transmitted in a processed form as the data to be sent from the master station to the slave station at the earliest when, on the basis of the second message, the type of processing

supported by the slave station or the types of processing supported by the slave station is/are known at the master station, the processing taking place in a manner supported by the slave station, and when the third message has been transmitted to the slave station. In this way, even before the special transmission channel from the master station to the slave station has been set up, signaling information may be processed in the master station in such a way that its reception quality at the slave station is increased and thus less complexity is required for elimination of distortion in the slave station, so that it is possible to save on the cost of distortion elimination in the slave station at the earliest point possible and thus also reduce power consumption.

Another advantage is that together with the signaling information before the third message, a first message is transmitted from the master station to the slave station containing information regarding which type(s) of processing of the data to be sent is/are supported by the master station. In this way, the slave station is able to select a type of processing of the data to be sent and make known to the master station the selected type of processing by way of the second message. The selection may be made by the slave station in such a way as to permit detection and distortion elimination of the data to be transmitted from the master station in a manner that is as favorable as possible for it and saves on complexity and power consumption.

The first message, the second message and the third message may each be transmitted between the master station and the slave station via a message element according to the corresponding independent claims and may thus be integrated especially easily into an existing signaling protocol in an advantageous manner.

Drawing

Embodiments of the present invention are illustrated in the drawing and explained in greater detail in the following description. Figure 1 shows a block diagram of a master station according to the present invention and a slave station according to the present invention; Figure 2 shows a flow chart for the exchange of signaling information according to a first embodiment; Figure 3 shows a flow chart for the exchange of signaling information according to a second embodiment; Figure 4 shows a flow chart for the exchange of signaling information according to a third embodiment; Figure 5 shows a flow chart for the exchange of signaling information according to a fourth embodiment; and Figure 6 shows an arrangement of the slave station according to the present invention in a cellular mobile wireless network before transmission from the master station to another master station.

Description of the Exemplary Embodiments

Figure 1 shows a master station 1 of a telecommunications network which may be designed to be wireless or hardwired. Figure 1 also shows a slave station 5 of the telecommunications network which may be designed to be wireless or hardwired. Between master station 1 and slave station 5, at least one transmission channel should be set up which may also be wireless or hardwired depending on the design of master station 1 and slave station 5. Then data is to be transmitted from master station 1 to slave station 5 over this at least one transmission channel, the at least one transmission channel being dedicated specifically to this data transmission from master station 1 to slave station 5. At least one separate transmission channel in each case may be set up for the transmission of data from master station 1 to other slave stations not shown in Figure 1. Such a transmission channel dedicated to the transmission of data from master station 1 to a special slave station is also

referred to below as a dedicated channel. When a transmission channel is mentioned below, it should be understood to refer to such a dedicated channel. To form such a dedicated channel, one or more physical resources may be used. These physical resources may be a frequency, a period of time, e.g., in the form of a time slot, a spatial sector, e.g., in the emission range of an antenna, a code or the like. If master station 1 supplies multiple slave stations with data, the individual transmission channels from master station 1 may be multiplexed, with the individual slave stations each being able to access the transmission channel assigned to them in accordance with the physical resources used according to a suitable channel access method to receive the data sent from master station 1 to these slave stations. Depending on the physical resources used, this channel access method may be a frequency division multiple access method (FDMA), a time division multiple access method (TDMA) or a space division multiple access method (SDMA), a code division multiple access (CDMA) method or the like or any desired combination of these methods.

For example, it should be assumed below that master station 1 is designed as a base station and slave station 5 is a mobile station of a mobile wireless network. The at least one transmission channel to be set up between base station 1 and mobile station 5 is then designed as a wireless channel. The mobile wireless network, base station 1 and mobile station 5 may be designed, for example, according to the GSM standard (global system for mobile communications), the UMTS standard (universal mobile telecommunication system) or the like. It should be assumed below, for example, that the mobile wireless network, base station 1 and mobile station 5 are designed according to the UMTS standard. Then the mobile wireless network according to the UMTS standard should be based on a CDMA system in TDD mode (time division duplex). A half duplex connection is set up between base station 1 and mobile station 5, providing different time slots for the transmission from

base station 1 to mobile station 5 and from mobile station 5 to base station 1. At least one time slot is provided for the transmission from base station 1 to mobile station 5. The data transmitted from base station 1 to mobile station 5 in this
5 time slot is coded according to a CDMA code and modulated to a carrier frequency. The CDMA code, the time slot and the carrier frequency are each a physical resource, the combination of which forms the transmission channel from base station 1 to mobile station 5. Mobile station 5 includes a
10 first receiving unit 85, which is connectable alternately to first detection means 30 or second detection means 35 over first selector means 25. First analyzer means 20 are connected to first receiving unit 85. First analyzer means 20 activate first message generating means 40, and first selector means 25
15 activate mobile station 5. A first receiving antenna 60 is connected to first receiving unit 85, and a transmitting antenna 70 of mobile station 5 is connected to first message generating means 40. First receiving antenna 60 and transmitting antenna 70 of mobile station 5 may also be
20 combined via an antenna splitter, for example, and joined together to form a common transmitting/receiving antenna. Base station 1 includes second analyzer means 50, second message generating means 45 and a processing unit 55. A second receiving antenna 65 is connected to second analyzer means 50
25 over a second receiving unit 90. Processing unit 55 is optionally connectable to a first antenna unit 10 or to a second antenna unit 15 over second selector means 75. Second message generating means 45 are optionally connectable to first antenna unit 10 or to processing unit 55 over third
30 selector means 80. First selector means 25, second selector means 75 and third selector means 80 may each be designed as a controllable switch according to Figure 1, first selector means 25 being activated by first analyzer means 20 and second selector means 75 and third selector means 80 being activated
35 by second analyzer means 50. First antenna unit 10 is designed as a single transmitting antenna. Second antenna unit 15 includes at least two transmitting antennas and makes it

possible to send out signals in a transmission diversity operation. With base station 1 it is also possible to combine transmitting and receiving antennas in the manner described with respect to mobile station 5 into one or (in the case of
5 transmission diversity operation) multiple transmitting/receiving antennas by using an antenna splitter.

To set up at least one transmission channel from base station 1 to mobile station 5, first an exchange of signaling
10 information between base station 1 and mobile station 5 is necessary to cause the corresponding allocation of physical resources necessary to form the transmission channel. The present invention provides for the data which is to be sent from base station 1 to mobile station 5 over the transmission
15 channel to be set up to be processed in base station 1 to increase the quality of reception of this data at mobile station 5. Detection of the data thus received then requires little or no additional complexity in mobile station 5, so the power consumption in mobile station 5 is reduced and the
20 standby time of mobile station 5 is increased. Mobile station 5 is then capable of switching between two different detection means 30, 35, depending on the quality with which the data is to be received from base station 1. However, to do so, mobile station 5 must know whether the data to be sent has been
25 processed at all in base station 1. Therefore, before setting up the transmission channel, a third message is transmitted from base station 1 to mobile station 5 with the signaling information, containing information regarding whether processing of the data to be sent is performed in master
30 station 1. The third message is generated by second message generating means 45 and emitted over third selector means 80 and first antenna unit 10 to first receiving unit 85. First analyzer means 20 then check on the basis of the third message to determine whether processing of the data to be sent is
35 performed in base station 1. If this is the case, then first detection means 30 are selected for the detection; otherwise, second detection means 35 are selected for the detection.

Optionally the data to be sent may be processed in base station 1 in various ways. Then with the third message, information regarding the type of processing of the data to be sent is also transmitted from base station 1 to slave station 5. To this end, as shown with dotted lines in Figure 1, mobile station 5 may include third detection means 36, which are also connectable to first receiving unit 85 over first selector means 25. First analyzer means 20 then check first on the basis of the third message whether the data to be sent has already been processed in base station 1. If this is not the case, then first analyzer means 20 cause first selector means 25 to connect first receiving unit 85 to second detection means 35. Otherwise, first analyzer means 20 check on the basis of the third message to determine the type of processing of the data to be sent in base station 1. Depending on the type of processing, first analyzer means 20 may then cause first selector means 25 to connect first detection means 30 or third detection means 36 to first receiving unit 85. The data to be sent from base station 1 is then detected by the detection means connected to first receiving unit 85.

It is possible to provide for the data to be sent from base station 1 to mobile station 5 to be transmitted in a single dedicated transmission channel. However, it is also possible for multiple dedicated transmission channels to be set up for the transmission. The third message is then transmitted individually from base station 1 to first analyzer means 20 over first receiving unit 85 for each transmission channel to be set up. This is indispensable, especially if the data to be sent in the various transmission channels is to be processed by different methods in base station 1 or if data without processing is to be sent in one transmission channel and data with processing is to be sent in another transmission channel. However, if data without processing is to be transmitted from base station 1 to mobile station 5 in multiple transmission channels or if data processed according to the same method is to be transmitted in various transmission channels, then it is

also possible for a single third message with regard to multiple transmission channels to be transmitted from base station 1 to mobile station 5 if the type of processing in these transmission channels is the same or if no processing takes place in these transmission channels.

Processing of the data to be sent may take place in base station 1 in various ways. First, the data to be sent from base station 1 may be emitted using a transmission diversity method by first antenna unit 10 having one transmitting antenna or by second antenna unit 15 having multiple transmitting antennas. Use of first antenna unit 10 having one transmitting antenna here represents the traditional case without processing of the data to be sent. When using second antenna unit 15 having multiple transmitting antennas, a multiway reception is generated in mobile station 5 through which signal dips or fading on one or more of the reception pathways may be compensated by a reception pathway without fading. Thus, with the third message it is possible to transmit information regarding whether the data to be sent from base station 1 is to be emitted by first antenna unit 10 or by second antenna unit 15. If the data to be sent is emitted by first antenna unit 10, first analyzer means 20 cause second detection means 35 to be connected over first selector means 25 to first receiving unit 85. Otherwise, third detection means 36 are connected to first receiving unit 85 over first selector means 25. Second detection means 35 then perform distortion removal and detection on the received data in the traditional manner, e.g., according to a joint detection method (JD). Such a method is known from the publication "System Description Performance Evaluation," Concept Group Delta WB-TDMA/CDMA, ETSI, SMG2. This is a combined cancellation of multiple user interference and intersymbol interference. Multiple user interference occurs due to mutual influencing of codes assigned to different mobile stations in transmission over multiplexed transmission

channels. Intersymbol interference occurs due to multiway propagation of signals in the radio channel.

5 Third detection means 36 may also operate according to a JD method adapted to second antenna unit 15 used with regard to the estimate of the pulse response of the transmission channels used which is necessary for removing distortion.

10 Processing of the data to be sent from base station 1 may also take place by predistortion of the data to be sent in processing unit 55. The predistortion is then compensated by the properties of the transmission channel to be set up in comparison with second detection means 35 so that the data to be sent from base station 1 arrives undistorted at first
15 receiving unit 85 and thus distortion removal is no longer necessary in mobile station 5. The data received may then be detected by first detection means 30, e.g., simply by correlation reception, to which end first detection means 30 are to be connected to first receiving unit 85 over first
20 selector means 25.

First detection means 30 may thus be designed merely as correlation receivers, e.g., according to a "matched filter" concept such as that known from the publication
25 "Signalübertragung," (Signal Transmission), Lüke, Springer-Verlag, 5th edition, 1991 because they detect suitably processed data from base station 1 arriving undistorted and therefore with a high reception quality at mobile station 5.

30 However, if the data is sent from base station 1 without predistortion to mobile station 5 over first antenna unit 10, the data reaches first receiving unit 85 with distortion and must be sent to second detection means 35 for distortion removal at an increased outlay. This is much less complex and
35 consumes less power than a strict correlation reception, for example, with first detection means 30. Either the third message is omitted in this case or the third message in this

case contains information that no processing takes place in the base station.

5 An even higher reception quality may be achieved if the predistortion is linked to the emission over second antenna unit 15 so that the signals to be sent arrive at first receiving unit 85 not only without distortion but also without signal dips or fading. Again in this case, only first detection means 30 may be connected with strict correlation
10 reception to first receiving unit 85 over first selector means 25, for example. Then with the third message, information is transmitted regarding the fact that the data to be sent from base station 1 is emitted by second antenna unit 15 and a
15 predistortion of the data to be sent is performed in base station 1.

First selector means 25 for connecting the corresponding detection means to first receiving unit 85 are controlled by first analyzer means 20 after analysis of the corresponding
20 third message.

With the CDMA system in TDD mode described here, the joint predistortion method (JP) known from the publication cited above "Summary of Joint Predistortion" is also recommended for
25 performing predistortion. Accordingly, with the third message, information regarding whether predistortion is performed by the JP method for the data to be sent is transmitted from base station 1 to mobile station 5. In the JP method, base station 1 estimates the pulse response of the transmission channel
30 from mobile station 5 to base station 1 by way of the time slots used for the transmission from mobile station 5 to base station 1. This estimate may also be used for the transmission channel to be set up from base station 1 to mobile station 5 because in TDD mode the transmission properties of the two
35 transmission channels are essentially the same in the forward and return directions and there are no frequency differences. The data to be sent is then folded with the inverse estimated

pulse response before being transmitted to mobile station 5 and thus it is predistorted.

It is also possible to provide for a second message to be transmitted from mobile station 5 to base station 1 with the signaling information before the third message containing information regarding which type(s) of processing of the data to be sent from base station 1 is/are supported by mobile station 5 for detection of this data. The second message is generated by first message generating means 40 and emitted by transmitting antenna 70 of mobile station 5 to base station 1 where it is received by second receiving unit 90 over second receiving antenna 65 and forwarded to second analyzer means 50. The types of processing supported by mobile station 5 depend on detection means 30, 35, 36 connectable to first receiving unit 85 over first analyzer means 25 in mobile station 5. Thus in the present example, the second message may contain the information that detection in mobile station 5 is possible by strict correlation reception and detection with prior distortion removal according to a joint detection method in two different stages with regard to the outlay for error detection and/or correction. Second analyzer means 50 analyze the second message then to determine which type(s) of processing of signals to be sent is/are supported by mobile station 5. Second analyzer means 50 then check whether this type or these types of processing is/are also supported by base station 1. In the present example, second analyzer means 50 ascertain that the detection offered by mobile station 5 is compatible, for example, with processing by predistortion and/or by predistortion and transmission diversity operation through strict correlation reception. In addition, second analyzer means 50 ascertain on the basis of the second message that the data to be sent cannot be sent to mobile station 5 or may be sent only in a partially processed form by transmission diversity operation because with the joint detection method the signals that are distorted on the transmission channel to be set up and are influenced to a greater or lesser extent by

fading may subjected to distortion removal and detected.
Second analyzer means 50 in this example thus ascertain that
the types of processing supported by mobile station 5 are also
supported by base station 1. Second analyzer means 50 then
5 select at least one type of processing, which is supported by
both base station 1 and mobile station 5, and activate second
message generating means 45 so that at least one selected type
of processing is indicated in the third message. In addition,
second analyzer means 50 activate processing unit 55 and
10 second selector means 75 so that they process the data to be
sent according to the at least one selected type of
processing. Thus, for example, if second analyzer means 50
ascertain on the basis of the second message that mobile
station 5 supports detection with strict correlation
15 reception, it causes processing unit 55 to predistort the
signals to be sent and causes second selector means 75 to
connect second antenna unit 15 or first antenna unit 10 to
processing unit 55. In addition, second analyzer means 50 then
cause second message generating means 45 to generate a third
20 message containing information regarding the fact that the
data to be sent is predistorted and is emitted over one or
more antennas. If the JP method is used for predistortion,
this may also be indicated in the third message.

25 This choice of processing of the data to be sent leads to
minimal complexity in mobile station 5 for detection of the
data received there and to a minimal power consumption.

It is also possible to provide for a first message to be
30 transmitted from base station 1 to mobile station 5 together
with the signaling information before the third message, this
first message containing information regarding which type(s)
of processing of the data to be sent is/are supported by base
station 1. To do so, second message generating means 45
35 generate the first message before transmitting the third
message and they transmit it to mobile station 5. In the
example described here, the first message contains information

regarding the fact that the data to be sent may be emitted without predistortion and with only one transmitting antenna to mobile station 5. In addition, the first message includes information regarding the fact that data to be sent from base station 1 may be emitted with predistortion and by only a single transmitting antenna. In addition, the first message contains information regarding the fact that the data to be sent may be emitted from base station 1 with predistortion and using multiple antennas. In addition, the first message contains information regarding the fact that the data to be sent may be emitted without predistortion but by multiple antennas. Thus four different types of processing are possible in base station 1 and are contained as information in the first message. The lack of processing of data without predistortion and the use of only one transmitting antenna is also counted as a type of processing. The first message thus generated is received in first receiving unit 85 of mobile station 5 and relayed to first analyzer means 20 for analysis. First analyzer means 20 then analyze the first message to determine which type(s) of processing of signals to be sent is/are supported by base station 1. First analyzer means 20 then check whether this type or these types of processing is/are also supported by mobile station 5. In the present example, first analyzer means 20 ascertain that the processing by predistortion with or without transmission diversity operation is supported by mobile station 5 through first detection means 30 with strict correlation reception. In addition, first analyzer means 20 ascertain that the lack of processing without predistortion and using only one transmitting antenna is supported by second detection means 35 by using the joint detection method. In addition, first analyzer means 20 ascertain that processing without predistortion and with transmission diversity operation is supported by third detection means 36 by using the joint detection method.

First analyzer means 20 then activate first message generating means 40 so that at least one type of processing is indicated in the second message which is supported by both base station 1 and mobile station 5. In this example, first analyzer means 5 20 may activate first message generating means 40 so that the second message may include information regarding the fact that detection with strict correlation reception is possible. Of course, the second message may also include information regarding the fact that detection with prior distortion removal by the joint detection method is possible. However, if 10 the latter types of information regarding possible distortion removal by the joint detection method are not included in the second message, then it is certain that base station 1 will provide processing of the data to be sent, permitting 15 detection with strict correlation reception in mobile station 5 and thus minimizing the power consumption in mobile station 5.

Optionally it is also possible to provide for the signaling information itself to be transmitted from base station 1 to 20 mobile station 5 in processed form as the data to be sent. However, this may take place at the earliest when the type of processing supported by mobile station 5 or the types of processing supported by mobile station 5 is/are known at base 25 station 1 on the basis of the second message, the processing taking place according to at least one type supported by mobile station 5. Before transmission of processed signaling information to mobile station 5, base station 1 also transmits a corresponding third message to mobile station 5 to inform 30 mobile station 5 promptly regarding the type of processing used, so that before transmission of the processed signaling information, mobile station 5 is able to set first selector means 25 accordingly to connect the required detection means to first receiving unit 85. In this way, it is also possible 35 to save on power consumption at mobile station 5 in the transmission of signaling information to mobile station 5, especially when the signaling information is processed so that

first detection means 30 using strict correlation reception may be used for detection of the received signaling information. In the example described here, the signaling information could be processed in base station 1 in such a way that it is predistorted, for example, and emitted over one or more transmitting antennas. Detection in mobile station 5 then takes place by connecting first detection means 30 to first receiving unit 85 over first selector means 25 so that strict correlation reception is possible.

Starting from the time when the signaling information is transmitted in processed form from base station 1 to mobile station 5, second analyzer means 50 cause third analyzer means 80 to interrupt the connection of second message generating means 45 to first antenna unit 10 and connect second message generating means 45 to processing unit 55. The processing is then performed as already described in general for the data to be sent. All the messages generated subsequently for the signaling information by second message generating means 45 are then sent in processed form to mobile station 5 according to the selected type or types of processing.

For the case when the data to be sent is not predistorted in processing unit 55 but instead is processed only by being emitted over multiple antennas, it is also possible to provide for the data which is to be sent to be only routed through processing unit 55 in a transparent form.

The data to be sent in processed form may be transmitted in a transmission channel dedicated only to the connection between base station 1 and mobile station 5. In the case of a predistortion performed in processing unit 55, this is indispensable according to the joint predistortion method because this predistortion is only characteristic of the dedicated forward and reverse channels between base station 1 and mobile station 5 and not characteristic of channels that are used jointly by multiple mobile stations. Suitably

processed signaling information may also be transmitted in the transmission channel dedicated only to the connection between base station 1 and mobile station 5. However, this goes at the earliest after transmission of the third message from base station 1 to mobile station 5 because only then is this transmission channel set up. First the signaling information is transmitted in a channel accessible to multiple mobile stations. This is then also true of transmission of the first message which is transmitted before the third message.

The first message, the second message and the third message are each transmitted in the form of a message element as part of the signaling information. Such a message element may be inserted especially easily into the existing protocols for exchange of signaling information.

The signaling information to be sent from base station 1 to mobile station 5 is generated by second message generating means 45 and is emitted by first antenna unit 10 to mobile station 5 over a channel used jointly by multiple mobile stations as long as the dedicated transmission channel to be set up between base station 1 and mobile station 5 is still in existence. If this transmission channel still exists, the additional signaling information is sent to mobile station 5 by second message generating means 45 over processing unit 55 and either first antenna unit 10 or second antenna unit 15. To generate the messages necessary for the signaling information, second message generating means 45 are activated by second analyzer means 50, which include a radio resource control RRC. By way of RRC, the operator of the mobile wireless network makes a decision regarding the allocation of the respective physical resources to the setting up of the dedicated transmission channel from base station 1 to mobile station 5. Thus, the physical resources of the transmission channel to be set up are managed in RRC. Whether and when base station 1 will perform joint predistortion in a time slot transmission channel, for example, is thus decided by the operator of the

mobile wireless network over RRC. Information regarding which physical resources are allocated by RRC to which mobile station and by which method is relayed to the respective mobile stations by RRC by using the signaling information to be formed in second message generating means 45. The messages to be formed for this signaling information and the associated message elements are known from the aforementioned publication "RRC Protocol Specification."

Figure 2 shows a possible signaling scenario plotted over a time axis representing the signaling information to be exchanged between base station 1 and mobile station 5 as a function of time.

Generation of the signaling information to be sent from mobile station 5 to base station 1 may be controlled by first message generating means 40 through first analyzer means 20. The signaling information of mobile station 5 is analyzed by second analyzer means 50 in base station 1, and the signaling information from base station 1 is analyzed by first analyzer means 20 in mobile station 5.

The signaling scenario according to Figure 2 is described for an incoming telephone call to mobile station 5 in an "idle mode" in which there is neither a data transmission between mobile station 5 and base station 1 nor is the exact location of mobile station 5 known to the mobile wireless network. In this idle mode, mobile station 5 may be localized only approximately in the mobile wireless network. Multiple radio cells spanning from one base station in each case are combined here to form a localization area each with the location of mobile station 5 in such a localization area being known. If mobile station 5 leaves one localization area to enter into another localization area, it will notify the network operator of this. If mobile station 5, which may be designed as a cellular telephone, for example, is called up and is in idle mode, base station 1 will first send a "paging" message to

mobile station 5 over a paging channel PCH because mobile station 5 is reachable most easily in this way because of its only approximate localization in idle mode. A connection from base station 1 to mobile station 5 is referred to below as a downlink and a connection from mobile station 5 to base station 1 is referred to as an uplink. The paging channel thus represents a downlink connection. Over this paging channel, mobile station 5 is signaled regarding the incoming call. The "paging" message goes at a first time t_1 to mobile station 5.

In idle mode, mobile station 5 assumes that the signaling information sent to it has not been processed, so that first analyzer means 20 activate first selector means 25 so that second detection means 35 are connected to first receiving unit 85 and a joint detection distortion removal and detection take place in mobile station 5. This is illustrated in Figure 2 on the side of the mobile station 5 through the letter combination JD at first time t_1 . Mobile station 5 responds to the "paging" message by sending an "RRC connection request" message to base station 1 over a physical RACH (random access channel) which is an uplink channel accessible to all mobile stations. With this message, mobile station 5 requests the network operator over base station 1 to set up a telecommunications link to the subscriber making the call. The RRC of base station 1 and thus the network operator of the mobile wireless network receive this "RRC connection request" message and cause second message generating means 45 to reply to mobile station 5 in response to this "RRC connection request" message with an "RRC connection setup" message. Mobile station 5 has made itself known in the mobile wireless network through this "RRC connection request" message and may be localized in this way in a radio cell of the mobile wireless network. In the example described here, this should be the radio cell of base station 1. Multiple mobile stations in the radio cell of base station 1 are supplied with signaling infection over a common FACH (forward access channel). The FACH is a common downlink channel for multiple mobile stations in the radio cell of base station 1. The "RRC

connection setup" message is transmitted from base station 1 over the FACH to mobile station 5. Mobile station 5 receives information regarding the mobile wireless network over the "RRC connection setup" message. The "RRC connection setup" message is received in mobile station 5 at a second time t_2 and is also subjected to distortion removal and detection by second detection means 35 by the joint detection method. The period of time between first time t_1 and second time t_2 is used to set up a signaling connection between base station 1 and mobile station 5 which is formed by the FACH in the downlink and by the RACH in the uplink. The RACH is a channel which is accessible to all mobile stations in the radio cell of base station 1. The signaling connection is thus installed completely starting at second time t_2 and is then used for further signaling.

As described here, a joint predistortion is suitable only for transmission channels which are set up especially for transmission of information between base station 1 and mobile station 5 and not for channels which are accessible to all mobile stations in the radio cell of base station 1, and therefore the joint predistortion method cannot be used for exchange of signaling information over the FACH. Therefore, when using the FACH for the transmission of signaling information from base station 1 to mobile station 5, a traditional distortion removal and detection method is necessary in mobile station 5, e.g., according to the joint detection method. According to the example described here, it is assumed that mobile station 5 supports the reception of signals predistorted by the joint predistortion method in that they connect first detection means 30 to first receiving unit 85 and thus make available a strict correlation reception. This means that mobile station 5 is able to receive signals predistorted by the JP method. To inform the mobile wireless network of this capability, mobile station 5 sends a "UE capability info" message to base station 1 after receiving an "RRC connection setup" message. UE here stands for user

equipment and thus for mobile station 5. The structure of the "UE capability information" message is known from the aforementioned publication "RRC Protocol Specification." The "UE capability info" message sent here contains among other things a message element having the name "UE mode capability." This message element provides information, among other things, regarding whether mobile station 5 supports TDD and/or FDD (frequency division duplex). The "UE mode capability" message element is also known from the aforementioned publication "RRC Protocol Specification." It is presented in Table 1 as follows.

Table 1

Parameter	Reference	Type	Comment
System capability (UMTS, GSM, other)			
UMTS capability (TDD, FDD)			
Chip rate capability			
Radio frequency capability			
Variable duplex distance capability			

According to the present invention, an additional piece of information is to be inserted into this message element "UE mode capability," signaling to base station 1 whether mobile station 5, which is sending the "UE capability info" message to base station 1, supports a joint predistortion method. The

new message element "UE mode capability" supplemented in this way is illustrated according to the present invention in Table 2.

Table 2

Parameter	Reference	Type	Comment
System capability (UMTS, GSM, other)			
UMTS capability (TDD, FDD)			
TDD mode (JD/JP)			TDD mode only
Chip rate capability			
Wireless frequency capability			
Variable duplex distance capability			

The supplementary parameter information "TDD mode (JD/JP)" in this example describes the fact that in TDD mode, mobile station 5 supports detection of signals predistorted by the JP method. The comment "TDD mode only" means that support of this detection is only possible in TDD mode. The JP method cannot be used in FDD mode, for example, because the pulse response for the forward channel from base station 1 to mobile station 5 cannot be estimated from the reverse channel from mobile station 5 to base station 1 because of the different frequency

positions in the forward channel and the reverse channel in FDD mode.

5 The mobile wireless network then knows on the basis of the new message element "UE mode capability" that mobile station 5 is able to receive JP-predistorted signals from base station 1. The RRC then causes second message generating means 45 to send a reception confirmation of the "UE capability info" message in the form of a "UE capability info confirm" message to
10 mobile station 5. This is also subjected to distortion removal by the JD method and is detected by mobile station 5, because it has not yet been predistorted in base station 1 and sent on the FACH to mobile station 5.

15 Then the parameters for the actual data transmission over the dedicated transmission channel(s) to be set up for the incoming call are negotiated between mobile station 5 and base station 1 or the mobile wireless network over the FACH and RACH. This is shown in Figure 2 through the double arrow
20 "direct transfer." After successful negotiation and definition of the parameters for the transmission channels to be set up via "direct transfer," base station 1 sends a "RAB setup" (radio access bearer) message to mobile station 5 over the FACH downlink channel. The structure of such a "RAB setup" message is also known from the aforementioned publication "RRC
25 Protocol Specification." With the "RAB setup" message, base station 1 notifies mobile station 5 of the configuration for the actual useful data traffic. The configuration is based on the parameters negotiated previously by direct transfer. Both
30 the signaling information received by direct transfer in mobile station 5 and the "RAB setup" message are transmitted from base station 1 to mobile station 5 over the FACH and are thus subjected to distortion removal by the JD method and are detected in mobile station 5. The "RAB setup" message
35 contains, among other things, a message element having the name "downlink time slot info" which notifies mobile station 5 of the time slot to be used for the downlink connection of the

transmission channel to be set up. So far, the "downlink time slot info" message element has contained as information only the number of the transmission channel to be set up for the downlink from mobile station 5 in downlink to the time slot to be used, i.e., the information about the time slot in which mobile station 5 will receive data from base station 1 over the transmission channel to be set up in the downlink. The "downlink time slot info" message element is also known from the aforementioned publication "RRC Protocol Specification" and is presented in Table 3.

Table 3

Parameter	Reference	Type	Comment	
Time slot number			Time slot to be used in the downlink (TDD only)	For each time slot

In the downlink, multiple dedicated transmission channels, each in the form of a time slot allocated to mobile station 5, may be set up between base station 1 and mobile station 5. The comment "for each time slot" in the "downlink time slot info" message element means that the same conditions apply for each allocated time slot.

The "downlink time slot info" message element is an optional message element of the "RAB setup" message.

According to the present invention, base station 1 also signals in the "downlink time slot info" message element additionally for each allocated time slot information regarding whether the data in this time slot has been predistorted at base station 1 according to the JP method for transmission over the respective transmission channel to be set up. Various allocated time slots may be treated

differently, i.e., data of a first allocated time slot may be predistorted according to the JP method in base station 1, and data of a second allocated time slot is not predistorted in base station 1. The "downlink time slot info" message element may then indicate for each time slot allocated for the downlink of the transmission channel to be set up in each case whether or not the data in this time slot has been predistorted according to the JP method at base station 1. The information regarding whether the data in a time slot allocated for the downlink has been predistorted by the JP method at base station 1 may be combined for multiple allocated time slots in the "downlink time slot info" message element if the data in these time slots is treated the same with regard to processing at base station 1.

Table 4 gives an example of a new "downlink time slot info" message element implemented according to the present invention.

Table 4

Parameter	Reference	Type	Comment	
Time slot number			Time slot to be used in the downlink (TDD only)	For each time slot
JD/JP indicator			(TDD only)	For each time slot

In the example according to Table 4, the "downlink time slot info" message element according to the present invention notifies mobile station 5 that all the time slots allocated to mobile station 5 for the respective transmission channel to be set up between base station 1 and mobile station 5 in the downlink are subjected to JP predistortion with respect to the data transmitted in them in TDD mode only.

The signaling scenario illustrated in Figure 2 is described as an example of processing of the data to be sent to base station 1 by the JP method. However, any other type of predistortion or processing of the data to be sent may also be provided at base station 1 to increase the quality of reception of this data at mobile station 5. Accordingly, the type of processing must be indicated in the new message element "UE mode capability" or in the new message element "downlink time slot info".

The "RAB setup" message is received at mobile station 5 at a third time t_3 . The signaling exchange between base station 1 and mobile station 5 takes place over the FACH in the downlink and over the RACH in the uplink between second time t_2 and third time t_3 , so that the signaling information received at mobile station 5 is still subjected to distortion removal and detected by the JD method in this example. After reception of the "RAB setup" message, mobile station 5 configures its physical layer and sets up a new physical uplink transmission channel from mobile station 5 to base station 1. After successful configuration, mobile station 5 then sends a "RAB configuration complete" message to base station 1 over the newly set-up and configured uplink transmission channel. Mobile station 5 signals to base station 1 via the "RAB configuration complete" message that it has set up this uplink transmission channel from mobile station 5 to base station 1 dedicated specifically to the transmission of data from mobile station 5 to base station 1.

After transmitting the "RAB setup" message, base station 1 accordingly sets up a downlink transmission channel from base station 1 to mobile station 5 dedicated specifically to the transmission of data from base station 1 to mobile station 5. A half duplex TDD mode in which one or more time slots each forms a dedicated uplink transmission channel, and one or more time slots different from those each forms a dedicated downlink transmission channel is thus possible over the two

transmission channels set up between base station 1 and mobile station 5. From the data transmitted with the time slots in the respective uplink transmission channel, base station 1 is able to estimate a pulse response of the respective uplink transmission channel, this estimated pulse response also representing an estimate of the pulse response of the at least one downlink transmission channel. The estimate may thus be used in base station 1 for JP predistortion of the data to be sent over the at least one downlink transmission channel from base station 1 to mobile station 5. All signaling information and data or useful data received by mobile station 5 from base station 1 from then on is received at mobile station 5 over the at least one new downlink transmission channel. This is both the actual data or useful data of the incoming call and additionally required signaling data. The double arrow labeled as "data exchange" between mobile station 5 and base station 1 characterizes this data exchange over uplink and downlink transmission channels dedicated especially to the connection between base station 1 and mobile station 5. The data to be sent from base station 1 to mobile station 5 is predistorted in base station 1 according to the JP method for at least one of the at least one downlink transmission channel and transmitted to mobile station 5, where it is detected via first detection means 30 by a strict correlation reception.

In a second embodiment according to Figure 3, the signaling scenario described above may be modified in such a way that mobile station 5 is already allocated an uplink channel and a downlink channel at second time t_2 via the "RRC connection setup" message from base station 1, the channels being henceforth dedicated only to the exchange of signaling information between base station 1 and mobile station 5. Mobile station 5 acknowledges the "RRC connection setup" message with an "RRC connection setup complete" message sent to base station 1 after already being transmitted to base station 1 over the newly set-up uplink channel and has notified it that this uplink channel has been set up

successfully. The uplink and downlink channels already allocated to mobile station 5 at second time t_2 for the transmission of the signaling information may thus be differentiated from the uplink and downlink channels allocated to mobile station 5 at third time t_3 for the transmission of the useful data of the incoming call.

However, it is also possible for the uplink and downlink channels allocated to mobile station 5 at second time t_2 to also be used for the transmission of useful data for the incoming call provided as of third time t_3 , for which purpose the uplink and downlink channels set up at second time t_2 need only be reconfigured at third time t_3 . Figure 3 shows the second embodiment with respect to the variant involving reconfiguration of the uplink and downlink channels.

In the second embodiment, which is characterized in that uplink and downlink channels are already allocated separately to mobile station 5 at second time t_2 , the JP method is nevertheless still used starting at third time t_3 and is signaled to mobile station 5 as described in the "RAB setup" message. When using the uplink and downlink channels allocated to mobile station 5 at second time t_2 after third time t_3 as well, the signaling to mobile station 5 of the JP method used by base station 1 starting at third time t_3 may also take place in the required reconfiguration of the uplink and downlink channels which takes place according to Figure 3 after sending the "RAB setup complete" message from mobile station 5 to base station 1 and before exchange of the useful data. The signaling information to be transmitted from base station 1 to mobile station 5 for the reconfiguration is not yet predistorted by base station 1 and thus is still subjected to distortion removal and detected in mobile station 5 according to the JD method. For the reconfiguration, the base station sends a "TRCH reconfiguration" message to mobile station 5; such a message is known from the prior publication "RRC Protocol Specification" cited above. With this "TRCH

reconfiguration" message, the parameters, such as the data rate, of the uplink and downlink channels already allocated to mobile station 5 at second time t_2 are reconfigured. Mobile station 5 then sends a "TRCH reconfiguration complete" message over an uplink channel reconfigured in this way, notifying base station 1 of the successful reconfiguration of the uplink channel. Then the useful data exchange of the incoming call between base station 1 and mobile station 5 may take place over the reconfigured uplink and downlink channels. Since, as described with regard to the first embodiment, in the "RAB setup" message, the "downlink time slot info" message element may already contain information regarding predistortion in base station 1, the "TRCH reconfiguration" message could already be predistorted in the base station, e.g., by the JP method, so that on being received in mobile station 5, this message could be detected by strict correlation reception. However, the "downlink time slot info" message element according to the present invention might also be integrated only into the "TRCH reconfiguration" message, so that the "TRCH reconfiguration" message is still subjected to distortion removal and detected in mobile station 5 by the JD method, and only the subsequent exchange of useful data of the incoming call and optionally additional signaling information to be exchanged may be detected in mobile station 5 through strict correlation reception, because it is predistorted by the JP method in base station 1. It has already been provided that the "TRCH reconfiguration" message (TRCH = transport channel) known from the aforementioned publication "RRC Protocol Specification" contains the "downlink time slot info" message element which informs, among other things, mobile station 5 whether processing, e.g., in the form of predistortion of the data to be sent subsequently, takes place in base station 1.

According to the second embodiment, a downlink channel dedicated to the transmission of signaling information from base station 1 to mobile station 5 is already provided

starting at second time t_2 , so that starting at second time t_2 , the signaling information to be sent from base station 1 could be predistorted by base station 1, so that it could be detected in mobile station 5 by strict correlation reception to save on power consumption in mobile station 5 at the earliest possible time. Starting with the second embodiment, therefore a third embodiment according to Figure 4 is obtained by the fact that in the "RRC connection request" message, mobile station 5 already transmits a message element having the name "initial UE capability" to base station 1, containing information regarding whether mobile station 5 supports predistortion, e.g., by the JP method, or whether it supports some other processing in base station 1. The "RRC connection request" message is known from the aforementioned publication "RRC Protocol Specification" as is the respective optional "initial UE capability" message element. Table 5 shows this "initial UE capability" message element, which was previously not filled with content.

Table 5

Parameter	Reference	Type	Comments

This message element may be modified according to the present invention as illustrated in Table 6:

Table 6

Parameter	Reference	Type	Comments
TDD mode (JP/JD)			TDD mode only

In the example according to Table 6, mobile station 5 notifies base station 1 via the new message element "initial UE capability" that it supports predistortion according to the JP method in base station 1. This takes place through strict

correlation reception of the received data. The "RRC connection setup" message transmitted at second time t_2 from base station 1 over the above-mentioned FACH to mobile station 5 is then not yet transmitted in predistorted form and is subjected to distortion removal and detected in mobile station 5 by the JD method. However, as already described for the "TRCH reconfiguration" message, this "RRC connection setup" message already contains the "downlink time slot info" message element via which base station 1 notifies mobile station 5 that the data to mobile station 5 on the dedicated downlink channel to be set up for further signaling is predistorted in base station 1 according to the JP method. In addition, at least one downlink channel and one uplink channel are allocated to mobile station 5 with the "RRC connection setup" message for further exchange of signaling information. Mobile station 5 acknowledges the "RRC connection setup" message with an "RRC connection setup complete" message sent to base station 1 after already being transmitted to base station 1 over the newly set-up uplink channel, notifying it that this uplink channel has been set up successfully. The exchange of the "UE capability info" message and the "UE capability info confirm" message is no longer necessary according to Figure 4, so that then a direct transfer may be performed in the allocated uplink and downlink channels, with the data transmitted from base station 1 to mobile station 5 already being predistorted according to the JP method. This is also true of all the other signaling data and useful data to be sent from base station 1 to mobile station 5 for the connection set up. Thus, no information notifying mobile station 5 of the JP predistortion in base station 1 is necessary even in the "RAB setup" message. However, such information is necessary in a "TRCH reconfiguration" message which is provided for a reconfiguration of the uplink and downlink channels that is optionally required, because in such a reconfiguration of mobile station 5, new time slots are optionally allocated.

According to Figure 5, a fourth embodiment which corresponds to the first embodiment is provided, with the difference that an additional "UE capability information request" message has been introduced, prompting base station 1 to cause mobile station 5 to send the "UE capability info" message to base station 1. Then following the "RRC connection setup" message, the "UE capability information request" message is then sent from base station 1 to mobile station 5, where it is optionally also subjected to distortion removal and detected by the joint detection method. The "UE capability information request" message is also known from the aforementioned publication "RRC Protocol Specification." In this "UE capability information request" message, information regarding the type of signaling data to be exchanged with the signaling information is normally transmitted to mobile station 5. According to the present invention, the "UE capability information request" message might also include a message element querying mobile station 5 regarding which types of processing in base station 1 are supported by mobile station 5. Information in this regard may also be transmitted from base station 1 to mobile station 5 in this additional message element or another additional message element of the "UE capability information request" message, indicating which types of processing of data to be sent are possible in base station 1. In the example described here, for example, it might be indicated in such an additional message element that the four types of processing by base station 1 as described above are possible if the lack of processing is also counted as a type of processing. In particular, the JP method could be indicated for the possible predistortion in base station 1 in the example described here. This additional message element having the information regarding the types of processing of the data to be sent which are supported by base station 1 then corresponds to, contains or is contained in the first message illustrated according to Figure 1.

The additional message element(s) may optionally also already be sent from base station 1 to mobile station 5 with the "RRC connection setup" message to save on the "UE capability information request" message. Since the "downlink time slot info" message element is already transmitted in the "RRC connection setup" message, the additional message element(s) could also be transmitted as part of the "downlink time slot info" message element, so that no additional message elements are necessary in the "RRC connection setup" message.

The message elements of the first three embodiments described here, which are transmitted from base station 1 to mobile station 5 and contain information regarding whether the data to be sent from base station 1 to mobile station 5 is processed in base station 1, thus corresponds to, contains or is contained in the third message illustrated according to Figure 1. The message elements transmitted from mobile station 5 to base station 1 in the first three embodiments mentioned above and containing information regarding whether processing in base station 1 of the data to be sent from base station 1 is supported by mobile station 5 or which type(s) of such processing in base station 1 is/are supported by mobile station 5 corresponds to, contains or is contained in the second message illustrated according to Figure 1.

In the four embodiments described here, it has been assumed for only the sake of the example that processing in base station 1 takes place according to the JP method. However, any desired type of processing of the data to be sent in base station 1 may also be signaled via the aforementioned message elements. The signaling may be implemented by setting one or more bits in the corresponding message element. It is possible to agree here that a set bit in the third message stands for a special type of processing of the data to be sent, performed by base station 1, whereas not setting this bit stands for this type of processing not being performed in base station 1. A set bit in the second message may be agreed upon such that a

specific type of processing of the data to be sent is supported by mobile station 5. Not setting this bit then means that this type of processing is not supported by mobile station 5. A similar agreement may be made for the first message. A set bit in the first message may be agreed upon such that a specific type of processing of the data to be sent is supported by base station 1. Not setting this bit then means that this type of processing is not supported by base station 1.

In addition, the first message at base station 1 may be sent continuously or at regular intervals to all mobile stations belonging to the mobile wireless network with a general system information such as that known from the aforementioned publication "RRC Protocol Specification." This first message may contain an additional message element which indicates to the mobile stations whether and which type or types of processing of data to be sent is/are supported by the mobile wireless network or base station 1 belonging to the mobile wireless network. This additional message element may be formed according to Table 6, but is then sent from base station 1 and is then called, for example, a "base station capability information" message element.

According to Figure 6, a portion of the mobile wireless network is shown, with master station 1 representing a first base station which spans a first radio cell 1000 and with another master station 2 being provided representing a second base station and spanning a second radio cell 2000, with first radio cell 1000 and second radio cell 2000 being in proximity to one another and overlapping slightly in a transitional area 3000. According to Figure 6, mobile station 5 has moved into transitional area 3000 within first radio cell 1000. Master station 1 then ascertains that mobile station 5 is able to exchange with second base station 2 signals having a higher reception quality than with first base station 1. Therefore, first base station 1 prepares for a transfer by second base

station 2 of the link that has been or is to be set up. Such a transfer is known as a handover. In preparation for and organization of the handover, suitable signaling information must be exchanged between first base station 1 and second base station 2. It is possible to provide for first base station 1 to transmit the third message to mobile station 5 with this signaling information, which however contains information regarding whether processing of the data to be sent is performed after the handover in second base station 2 to increase the reception quality of this data at mobile station 5, and if so, which type(s) of processing is/are used. Thus, in the case of a handover before the change from first base station 1 to second base station 2, i.e., before setting up a dedicated transmission channel between second base station 2 and mobile station 5, mobile station 5 may decide in the manner described here how it must perform distortion removal and detection of the data to be sent by second base station 2 to be able to guarantee optimum data reception in which the power consumption is minimized. The possible types of processing of the data to be sent by second base station 2 thus correspond to the types supported by first base station 1, for example, but may also be different. It is also possible for just one type of processing to be supported by second base station 2.

What is claimed is:

1. A method of transmitting signaling information between a master station (1), in particular a base station, and a slave station (5), in particular a mobile station, wherein a third message is transmitted with the signaling information from the master station (1) to the slave station (5), the message containing information as to whether data to be sent is processed in the master station (1) or in an additional master station (2) downstream from and assigned to the slave station (5), preferably in the change of the slave station from a first radio cell to a second radio cell of a radio network, to increase the reception quality of this data at the slave station (5).

2. The method according to Claim 1, wherein information regarding the type of processing of the data to be sent is transmitted with the third message from the master station (1) to the slave station (5).

3. The method according to Claim 1 or 2, wherein the third message with regard to exactly one transmission channel for the transmission of the data to be sent is transmitted.

4. The method according to Claim 1, 2 or 3, wherein the third message with regard to multiple transmission channels for the transmission of the data to be sent is transmitted when the type of processing in these transmission channels is the same.

5. The method according to one of the preceding claims, wherein information regarding whether the data to be sent from the master station (1) or from the additional master station (2) downstream from and assigned to the slave station (5) is emitted by one antenna (10) or by multiple antennas (15) is transmitted with the third message.

6. The method according to one of the preceding claims, wherein information regarding whether the data to be sent is predistorted, in particular according to a joint predistortion (JP) method, in the master station (1) or in the additional master station (2) downstream from and assigned to the slave station (5) is transmitted with the third message.
7. The method according to Claim 6, wherein information regarding whether predistortion is performed as a function of the estimated pulse response of at least one time slot transmission channel between the slave station (5) and the master station (1) or the additional master station (2) downstream from and assigned to the slave station (5) is transmitted with the third message.
8. The method according to one of the preceding claims, wherein, together with the signaling information before the third message, a second message containing information as to which type(s) of processing of the data to be sent by the master station (1) is/are supported by the slave station (5) to detect this data is transmitted from the slave station (5) to the master station (1).
9. The method according to Claim 8, wherein the data to be sent is processed in the master station (1) as a function of the second message in a manner supported by the slave station (5) for detecting the data.
10. The method according to Claim 9, wherein the data to be sent, processed in this way, is transmitted in a transmission channel dedicated only to the connection between the master station (1) and the slave station (5).
11. The method according to Claim 8, 9 or 10, wherein the signaling information is transmitted in a processed form as the data to be sent from the master station (1) to the slave station (5) at the earliest when, on the basis of the second

message, the type or types of processing supported by the slave station (5) is/are known at the master station (1), the processing taking place in a manner supported by the slave station (5), and when the third message has been transmitted to the slave station (5).

12. The method according to one of the preceding claims, wherein, together with the signaling information before the third message, a first message containing information as to which type(s) of processing of the data to be sent is/are supported by the master station (1) is transmitted from the master station (1) to the slave station (5).

13. The method according to Claim 12, wherein the first message is transmitted in a transmission channel that is accessible to multiple slave stations.

14. The method according to one of the preceding claims, wherein signaling information is transmitted in a processed form at the earliest after transmission of the third message to the slave station (5) from the master station (1) or from the additional master station (2) downstream from and assigned to the slave station (5), and the signaling information is first transmitted in a transmission channel accessible to multiple slave stations.

15. A slave station (5), in particular a mobile station, for implementing a method according to one of the preceding claims, wherein first evaluating means (20) are provided for analyzing a third message from a master station (1), in particular a base station, to determine whether data to be sent to the slave station (5) from the master station (1) or from an additional master station (2) downstream from and assigned to the slave station (5) has been processed by the master station (1) or by the additional master station (2) downstream from and assigned to the slave station (5) to increase the reception quality.

16. The slave station (5) according to Claim 15, wherein the first evaluating means (20) analyze the third message to determine which type of processing has been used by the master station (1) or the additional master station (2) downstream from and assigned to the slave station (5) on the data to be sent.

17. The slave station (5) according to Claim 15 or 16, wherein first selection means (25) are provided that select, as a function of the third message analyzed by the first evaluating means (20), detection means (30, 35) with which it is possible to detect the data to be sent by the master station (1) or by the additional master station (2) downstream from and assigned to the slave station (5).

18. The slave station (5) according to Claim 15, 16 or 17, wherein first message generating means (40) are provided that generate a second message as a function of the type(s) of processing of data to be sent by the master station (1) supported by the slave station (5) and transmit this message to the master station (1).

19. The slave station (5) according to one of Claims 15 through 18, wherein the first evaluating means (20) analyze a first message from the master station (1) to determine which type(s) of processing of signals to be sent is/are supported by the master station (1), the first evaluating means (20) check whether this type or these types of processing is/are also supported by the slave station (5), and the first evaluating means (20) activate the first message generating means (40) so that at least one type of processing, which is supported by both the master station (1) and the slave station (5), is indicated in the second message.

20. A master station (1), in particular a base station, for implementing a method according to one of Claims 1 through 14, wherein second message generating means (45) are provided that

generate a third message containing information regarding the fact that processing of data to be sent is performed in the master station (1) or in an additional master station (2) downstream from and assigned to the slave station (5) to increase the reception quality of this data at a slave station (5), in particular a mobile station, and the second message generating means (45) transmit the third message to the slave station (5).

21. The master station (1) according to Claim 20, wherein the second message generating means (45) indicate in the third message the type of processing performed on the data to be sent in the master station (1) or in the additional master station (2) downstream from and assigned to the slave station (5).

22. The master station (1) according to Claim 20 or 21, wherein, prior to transmitting the third message, the second message generating means (45) generate a first message containing information regarding the type or types of processing of data to be sent by the master station (1) supported by the master station (1), and the second message generating means (45) transmit the first message to the slave station (5).

23. The master station (1) according to Claim 20, 21 or 22, wherein second evaluating means (50) are provided for analyzing a second message from the slave station (5) to determine which type(s) of processing of signals to be sent is/are supported by the slave station (5), the second evaluating means (50) check whether this type or these types of processing is/are also supported by the master station (1), the second evaluating means (50) select at least one type of processing that is supported by both the master station (1) and the slave station (5), the second evaluating means (50) activate the second message generating means (45) so that the at least one selected type of processing is indicated in the

third message, and the second evaluating means (50) activate a processing unit (55) so that it processes the data to be sent according to the at least one selected type.

24. The master station (1) according to Claim 23, wherein the processing unit (55) performs a predistortion, in particular a joint predistortion.

25. The master station (1) according to Claim 23 or 24, wherein the processing unit (55) emits the signals to be sent over multiple antennas (15).

26. A message element for transmission from a master station (1), in particular a base station, to a slave station (5), in particular a mobile station, in particular as part of an exchange of signaling information, wherein the message element contains information regarding whether data to be sent is processed by the master station (1) or by an additional master station (2) downstream from and assigned to the slave station (5) to increase the reception quality at the slave station (5).

27. The message element according to Claim 26, wherein the message element contains information regarding which type or types of processing is/are used on the signals to be sent.

28. The message element for transmission from a master station (1), in particular a base station, to a slave station (5), in particular a mobile station, in particular as part of an exchange of signaling information, wherein the message element contains information regarding which type or types of processing of signals to be sent is/are supported by the master station (1) or an additional master station (2) downstream from and assigned to the slave station (5) to increase the reception quality at the slave station (5).

29. The message element for transmission from a slave station (5), in particular a mobile station, to a master station (1), in particular a base station, in particular as part of an exchange of signaling information, wherein the message element contains information regarding which type or types of processing of signals to be sent by the master station (1) or an additional master station (2) downstream from and assigned to the slave station (5) is/are supported by the slave station (5) in detection of these signals to increase the reception quality at the slave station (5).

Abstract

A method of transmitting signaling information between a master station (1) and a slave station (5), a master station (1), a slave station (5), and various message elements are described, that are used to reduce the power consumption in a mobile slave station. A third message containing information regarding whether data to be sent is processed in the master station (1) to increase the reception quality of this data at the slave station (5) is transmitted with the signaling information from the master station (1) to the slave station (5).

2 / 5

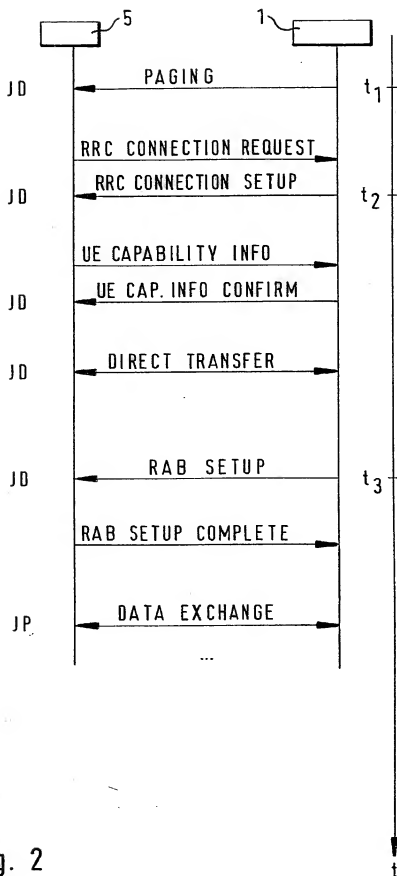


Fig. 2

3 / 5

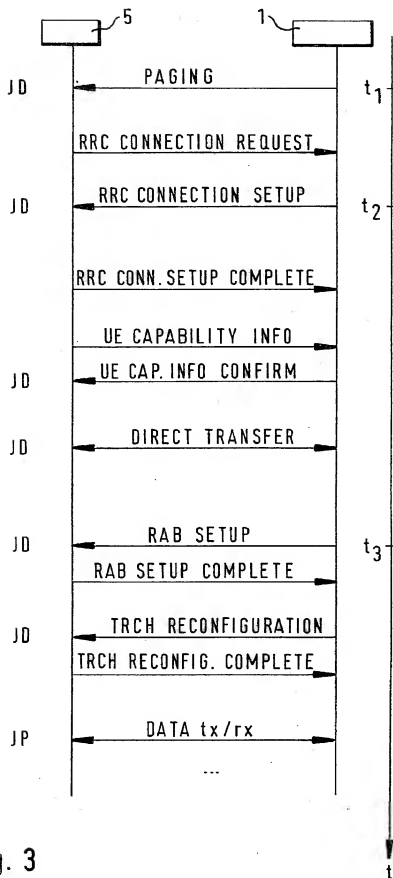


Fig. 3

4 / 5

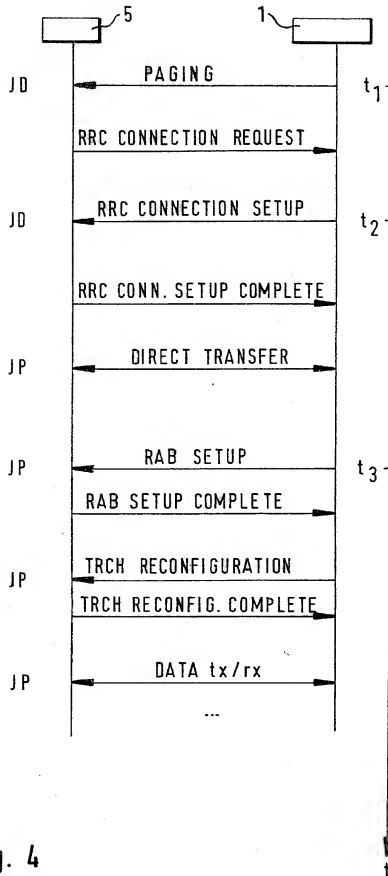


Fig. 4

5 / 5


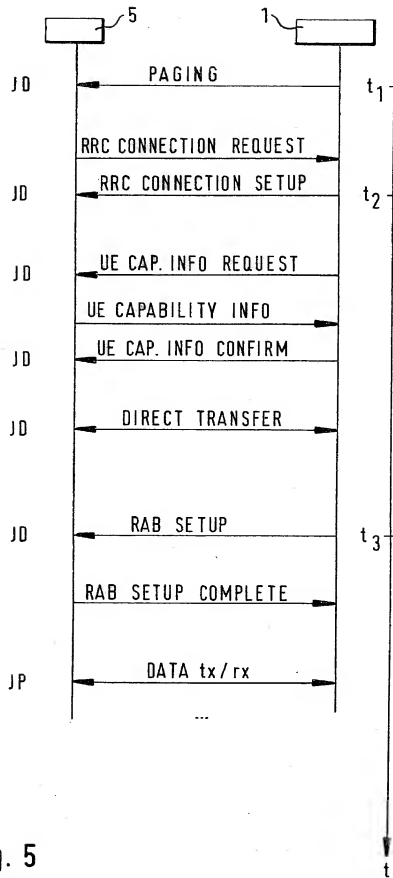


Fig. 5

Fig. 6

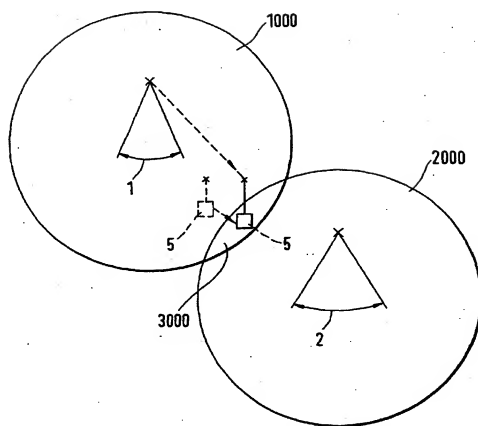

#6

[10191/2215]

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD OF TRANSMITTING SIGNALING INFORMATION, MASTER STATION, MOBILE STATION AND MESSAGE ELEMENTS**, the specification of which was filed as International Application **PCT/DE00/02128** on June 30, 2000.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

2LS94613706

PRIOR FOREIGN APPLICATION(S)

Number	Country filed	Day/month/year	Priority Claimed Under 35 USC 119
199 41 432.7	Fed. Rep. of Germany	30 August 1999	Yes
199 42 768.2	Fed. Rep. of Germany	08 September 1999	Yes

And I hereby appoint Richard L. Mayer (Reg. No. 22,490) and Gerard A. Messina (Reg. No. 35,952) my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Please address all communications regarding this application to:

KENYON & KENYON
One Broadway
New York, New York 10004
CUSTOMER NO. 26646




26646
PATENT TRADEMARK OFFICE

Please direct all telephone calls to Richard L. Mayer at (212) 425-7200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful and false statements may jeopardize the validity of the application or any patent issued thereon.

1-00 Inventor: **Martin HANS**

Inventor's Signature: _____



Date: 7.6.02

Residence: Spandauer Weg 9
31141 Hildesheim *DEX*
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

200 Inventor: Josef LAUMEN

Inventor's Signature: _____

Josef Laumen

Date: _____

07.06.2002

Residence:

~~Hansering 56~~

31141 Hildesheim

Federal Republic of Germany

WICKERSTRASSE 23 B

DEX

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

300 Inventor: Mark BECKMANN

Inventor's Signature: Mark Beckmann

Date: 10.6.'02

Residence: Vogelweg 7
31789 Hamel DEX
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

400 Inventor: Volker DEICHMANN

Inventor's Signature: Volker Deichmann

Date: 24.06.2002

Residence:

~~Hasestrasse 12~~
~~31137 Hildesheim~~

Edwardsstrasse 12
42275 Wuppertal

DEX

Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.